



PLI/GB 2004 / 0 0 1 2 3 A.



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 04 JUN 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

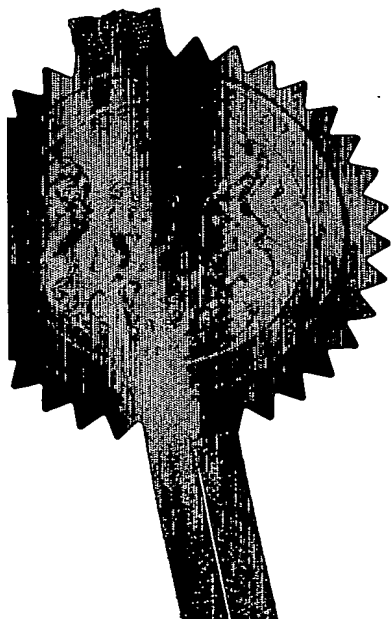

R. Mahoney

Signed

Dated 20 April 2004

Best Available Copy



22SEP03 E838712-1 D00001
P01/7700 0.00-0322024.1

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



1. Your reference 9422 GB(2)/ MPC

2. Patent application number
(The Patent Office will fill this part in)

0322024.1

19 SEP 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

BlazePhotonics Limited
Finance Office, University of Bath
The Avenue, Claverton Down
Bath
BA2 7AY

Patents ADP number (if you know it)

814129001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention Enhanced optical waveguide

5. Name of your agent (if you have one)

Abel & Imray

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

20 Red Lion Street
London
WC1R 4PQ
United Kingdom

Patents ADP number (if you know it)

174001 ✓

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Yes

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 35

Claim(s) 6

Abstract 0

Drawing(s) 15

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Abel & Imray

Date 19/09/03

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Matthew Critten 01225 469914

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

Enhanced Optical Waveguide

(Ref: 0082)

The present invention is in the field of optical waveguides and relates in particular to optical waveguides that guide light by virtue of a photonic bandgap.

5 Optical fibre waveguides, which are able to guide light by virtue of a so-called photonic bandgap (PBG), were first proposed in 1995.

In, for example, "Full 2-D photonic bandgaps in silica/air structures", Birks et al., Electronics Letters, 26 October 1995, Vol. 31, No. 22, pp.1941-1942, it was proposed that a PBG may be created in an optical fibre by providing a dielectric cladding structure, which has
10 a refractive index that varies periodically between high and low index regions, and a core defect in the cladding structure in the form of a hollow core. In the proposed cladding structure, periodicity was provided by an array of air holes that extended through a silica glass matrix material to provide a PBG structure through which certain wavelengths of light could not pass. It was proposed that light coupled into the hollow core defect would be unable to
15 escape into the cladding due to the PBG and, thus, the light would remain localised in the core defect.

It was appreciated that light travelling through a hollow core defect, for example filled with air or even under vacuum, would suffer significantly less from undesirable effects, such as non-linearity and loss, compared with light travelling through a solid silica or doped silica
20 fibre core. As such, it was appreciated that a PBG fibre may find application as a transmission fibre to transmit light between a transmitter and a receiver over extremely long distances, for example under the Atlantic Ocean, without undergoing signal regeneration, or as a high optical power delivery waveguide. In contrast, for standard index-guiding, single mode optical fibre, signal regeneration is typically required approximately every 80
25 kilometres.

The first PBG fibres that were attempted by the inventors had a periodic cladding structure formed by a triangular lattice of circular air holes embedded in a solid silica matrix and surrounding a central air core defect. Such fibres were formed by stacking circular or hexagonal capillary tubes, incorporating a core defect into the cladding by omitting a single,
30 central capillary of the stack, and then heating and drawing the stack, in a one or two step process, to form a fibre having the required structure.

International patent application PCT/DK99/00193 describes various PBG fibre structures, for example having a cladding region based on a honeycomb lattice with a central

air core. The air core is the same size as holes in the cladding region. The structure of the cladding produces a PBG and the air core, which creates a defect in the cladding, enables light to be guided in the glass in the locality of the air core.

International patent application PCT/GB00/01249 (The Secretary of State for Defence, UK), filed on 21 March 2000, proposed the first PBG fibre to have a so-called seven-cell core defect, surrounded by a cladding comprising a triangular lattice of air holes embedded in an all-silica matrix. The core defect was formed by omitting an inner capillary and, in addition, the six capillaries surrounding the inner capillary. This fibre structure was seen to guide one or two modes in the core defect, in contrast to the previous, single-cell core defect fibre, which appeared not to support any guided modes in the core defect.

According to PCT/GB00/01249, it appeared that the single-cell core defect fibre, by using analogous calculations to the density-of-states calculations of solid-state physics, would only support approximately 0.23 modes. That is, it was not surprising that the single-cell core defect fibre appeared to support no guided modes in its core defect. In contrast, based on the seven-fold increase in core defect area (increasing the core defect radius by a factor of $\sqrt{7}$), the seven-cell core defect fibre was predicted to support approximately 1.61 spatial modes in the core defect. This prediction was consistent with the finding that the seven-cell core defect fibre did indeed appear to support at least one guided mode in its core defect.

A preferred fibre in PCT/GB00/01249 was described as having a core defect diameter of around $15\mu\text{m}$ and an air-filling fraction (AFF) – that is, the proportion by volume of air in the cladding – of greater than 15% and, preferably, greater than 30%.

In “Analysis of air-guiding photonic bandgap fibres”, Optics Letters, Vol. 25, No. 2, January 15, 2000, Broeng et al. provided a theoretical analysis of PBG fibres. For a fibre with a seven-cell core defect and a cladding comprising a triangular lattice of near-circular holes, providing an AFF of around 70%, the structure was shown to support one or two air guided modes in the core defect. This was in line with the finding in PCT/GB00/01249.

In the chapter entitled “Photonic Crystal Fibers: Effective Index and Band-Gap Guidance” from the book “Photonic Crystal and Light Localization in the 21st Century”, C.M. Soukoulis (ed.), ©2001 Kluwer Academic Publishers, the authors presented further analysis of PBG fibres based primarily on a seven-cell core defect fibre. The optical fibre was fabricated by stacking and drawing hexagonal silica capillary tubes. The authors suggested that a core defect must be large enough to support at least one guided mode but that, as in conventional fibres, increasing the core defect size would lead to the appearance of higher

order modes. The authors also went on to suggest that there are many parameters that can have a considerable influence on the performance of bandgap fibres: choice of cladding lattice, lattice spacing, index filling fraction, choice of materials, size and shape of core defect, and structural uniformity (both in-plane and along the axis of propagation).

5 WO 02/075392 (Corning, Inc.) identifies a general relationship in PBG fibres between the number of so-called surface modes that exist at the boundary between the cladding and core defect of a PBG fibre and the ratio of the radial size of the core defect and a pitch of the cladding structure, where pitch is the centre to centre spacing of nearest neighbour holes in the triangular lattice of the exemplified cladding structure. It is suggested that when the core defect boundary, together with the photonic bandgap crystal pitch, are such that surface modes are excited or supported, a large fraction of the "light power" propagated along the fibre is essentially not located in the core defect. Accordingly, while surface states exist, the suggestion was that the distribution of light power is not effective to realise the benefits associated with the low refractive index core defect of a PBG crystal optical waveguide. The mode energy fraction in the core defect of the PBG fibre was shown to vary with increasing ratio of core defect size to pitch. In other words, it was suggested that the way to increase mode energy fraction in the core defect is by decreasing the number of surface modes, in turn, by selecting an appropriate ratio of the radial size of the core defect and a pitch of the cladding structure. In particular, WO 02/075392 states that, for a circular core structure, a ratio of core radius to pitch of around 1.07 to 1.08 provides a high mode power fraction of not less than 0.9 and the structure is single mode guiding. Other structures are considered, for example in Figure 7 therein, wherein the core defect covers an area equivalent to 16 cladding holes.

In a Post-deadline paper presented at ECOC 2002, "Low Loss (13dB) Air core defect Photonic Bandgap Fibre", N. Venkataraman et al. reported a PBG fibre having a seven-cell core defect that exhibited loss as low as 13dB/km at 1500nm over a fibre length of one hundred metres. The structure of this fibre closely resembles the structure considered in the book chapter referenced above. The authors attribute the relatively small loss of the fibre as being due to the high degree of structural uniformity along the length of the fibre.

30 An alternative kind of PBG fibre, which does not have a cladding comprising a lattice of high and low refractive index regions, is described in WO00/22466. These PBG fibres typically comprise, in a transverse cross section, concentric, increasingly large, annuli of

varying high and low refractive index material, which create an omni-directional reflector capable of confining light to a core region of the fibre.

PBG fibre structures are typically fabricated by first forming a pre-form and then heating and drawing an optical fibre from that pre-form in a fibre-drawing tower. It is known either to form a pre-form by stacking capillaries and fusing the capillaries into the appropriate configuration of pre-form, or to use extrusion.

For example, in PCT/GB00/01249, identified above, a seven-cell core defect pre-form structure was formed by omitting from a stack of capillaries an inner capillary and, in addition, the six capillaries surrounding the inner capillary. The capillaries around the core defect boundary in the stack were supported during formation of the pre-form by inserting truncated capillaries, which did not meet in the middle of the stack, at both ends of the capillary stack. The stack was then heated in order to fuse the capillaries together into a pre-form suitable for drawing into an optical fibre. Clearly, only the fibre drawn from the central portion of the stack, with the missing inner seven capillaries, was suitable for use as a hollow core defect fibre.

US patent application number US 6,444,133 (Corning, Inc.), describes a technique of forming a PBG fibre pre-form comprising a stack of hexagonal capillaries in which the inner capillary is missing, thus forming a core defect of the eventual PBG fibre structure that has flat inner surfaces. In contrast, the holes in the capillaries are round. US 6,444,133 proposes that, by etching the entire pre-form, the flat surfaces of the core defect dissolve away more quickly than the curved surfaces of the outer capillaries. The effect of etching is that the edges of the capillaries that are next to the central defect fully dissolve, while the remaining capillaries simply experience an increase in hole-diameter. Overall, the resulting pre-form has a greater fraction of air in the cladding structure and a core defect that is closer to a seven-cell core defect than a single cell core defect.

PCT patent application number WO 02/084347 (Corning, Inc.) describes a method of making a pre-form comprising a stack of hexagonal capillaries of which the inner capillaries are preferentially etched by exposure to an etching agent. Each capillary has a hexagonal outer boundary and a circular inner boundary. The result of the etching step is that the centres of the edges of the hexagonal capillaries around the central region dissolve more quickly than the corners, thereby causing formation of a core defect. In some examples, the circular holes are offset in the inner hexagonal capillaries of the stack so that each capillary has a wall that is thinner than its opposite wall. These capillaries are arranged in the stack so that their thinner

walls point towards the centre of the structure. An etching step, in effect, preferentially etches the thinner walls first, thereby forming a seven-cell core defect.

In arriving at the present invention, the inventors have appreciated and demonstrated that, while the size of a core defect is significant in determining certain characteristics of a PBG waveguide, the form of a boundary at the interface between core and cladding also plays a significant role in determining certain characteristics of the waveguide. By way of example, as will be described in detail hereafter, the inventors have shown that, for given PBG core and cladding structures, variations in only the thickness of the boundary, at the interface between the core and cladding, can cause significant changes in the characteristics of a respective waveguide.

According to a first aspect, the present invention provides an optical waveguide, comprising:

a core, comprising an elongate region of relatively low refractive index;

a photonic bandgap structure arranged to provide a photonic bandgap over a range of wavelengths of light including an operating wavelength of light, the structure, in a transverse cross section of the waveguide, surrounding the core and comprising elongate relatively low refractive index regions interspersed with elongate relatively high refractive index regions; and

a relatively high refractive index boundary at the interface between the core defect and the photonic bandgap structure, the boundary having a thickness around the core such that the boundary is substantially anti-resonant at the operating wavelength of light.

It has been widely reported that light may be guided in a PBG fibre by virtue of a cladding which provides a PBG. It has also been reported by Litchinitser *et al.*, Opt Lett., Vol. 27 (2002) pp. 1592-1594, that light may be guided in a PBG-like fibre predominantly by anti-resonant reflection in multiple cladding layers, similar to the aforementioned concentric structure. Litchinitser *et al.* describe a fibre structure comprising a low index core surrounded by plural concentric layers of high and low index material, the relative thicknesses of which were chosen to provide an anti-resonant cladding structure for confining light to the core region. Litchinitser *et al.* also disclose a fibre structure consisting of a silica core surrounded by holes filled with high index liquid. In that case the silica represents the low index medium and the filled holes are the features that act as resonators. It was suggested that, at their anti-resonant wavelengths, the filled holes could substantially exclude light and thus confine light to the relatively low-index silica core. It was also stated that numerical simulations on such a

structure were very time consuming and so the study was limited to the concentric ring structure.

In order to understand the effects of resonance and anti-resonance in optical structures it is instructive to first consider a simple example of an optical resonator such as a Fabry-

5 Perot interferometer. Whether or not light can resonate in such a feature depends on the feature's size, shape and composition, and also on the wavelength and direction of propagation of the light. As the wavelength is varied the feature moves into and out of resonance. For a given excitation, on resonance, the optical power in the features assumes a maximum. In between resonances, optical power in the features is minimised. If the
10 relatively low refractive index regions are air, it is desirable to maximise the amount of light in these regions in order to reduce scattering, non-linearities and other deleterious effects. That is advantageous as it raises the proportion of light in the low-index regions and decreases F-factor (described hereinafter). Hence it is advantageous to incorporate features that possess strong distinct resonances, and adjust their sizes and shapes so that they are anti-resonant at
15 the optical wavelengths and directions of propagation of interest.

The present inventors have discovered that confinement of light to a core of a PBG fibre, which confines light to the core region by virtue of a photonic bandgap, may be enhanced by providing, at the interface between the core and the photonic bandgap cladding, a boundary which is tuned to be substantially anti-resonant. Unlike in Litchinitser *et al.*, in
20 which anti-resonance is achieved using concentric layers of material or distinct, unconnected resonators, a core boundary proposed herein may comprises a single, unbroken region of relatively high refractive index at the interface between the core and the photonic bandgap structure. The present inventors have discovered that such a core boundary can be arranged to be anti-resonant at an operating wavelength, and thereby serve to confine light to the core of
25 the waveguide. The present inventors have also discovered that it is possible to achieve a similar confinement of light to a core by arranging plural anti-resonant features around an unbroken, but otherwise generally non-anti-resonant, core boundary. This latter kind of confinement, while being closely related to the former kind, is described more fully in applicants co-pending patent applications entitled "Improvements in and relating to optical
30 waveguides", filed on the same date as the present application, having the agent's reference no. 9379 GB(2) and in co-pending British Patent Application No. 0306606.5 (the entire teaching of both of those applications is hereby incorporated by reference).

The boundary may have a different structure from the structure of the rest of the photonic band-gap structure. For example, boundary may comprise thicker or thinner regions than those corresponding to regions in the rest of the structure. The regions of relatively high refractive index may include nodes that are in different positions or have different sizes from corresponding features in the rest of the structure. The boundary may comprise, or include a region of, a different refractive index than the relatively high refractive index regions in the photonic band-gap structure.

Considering, for example, an air-core and silica PBG fibre, the inventors have determined that the geometry of the region of the boundary between the air core and the photonic bandgap cladding structure has profound effects on the modal properties of the fibre. In particular, the inventors have appreciated that the number of guiding modes within the band gap, the fraction of the light power of the guided modes confined within the air core and the field intensity of these modes at the air-silica interfaces all vary sensitively with the geometry within the region. In particular, the inventors have shown that by tailoring the geometry, the properties of an LP_{01} -like mode (when present), which possesses an approximately Gaussian intensity profile towards the centre of the core, can be tailored so that up to and even over 99% of the light is confined within air, and predominantly in the core. This implies that loss due to Rayleigh scattering in the silica may be suppressed by up to two orders of magnitude and that nonlinearity may be substantially reduced compared with standard index guiding single mode fibre. Also, the inventors have demonstrated that the core boundary geometry can be designed to reduce the field intensity of this mode strongly in the vicinity of the air-silica interfaces. This has the effect of reducing both the small scale interface roughness scattering, which is discussed in detail hereafter, and the mode coupling due to longer range fibre variations.

The inventors have determined that the design of a core-cladding interface, or boundary region, can exploit an anti-resonance effect to strongly enhance the power in air fraction, η , and reduce the field intensity at the air-silica interfaces of core-guided modes, such as the LP_{01} -like mode. As has already been stated, the inventors have found that the geometry giving rise to the anti-resonance can be based either on a continuous silica boundary layer encircling the air core, such as in the example shown in Figure 1, or on a number of localised regions of silica existing around the core boundary, such as in the example shown in Figure 2.

The inventors suggest that the mechanism by which an anti-resonance of a continuous core surround can occur may be understood by considering a circular tube of silica of constant thickness t and mean radius R , of the inner and outer silica/air interfaces, surrounded by air, as shown in Figure 3. The properties of this system can be analysed exactly by expressing the fields in regions I, II and III in terms of Bessel functions using known techniques. The cylindrical symmetry implies that modes decouple according to an integer m , which governs the azimuthal variation of the fields around the tube. An eigenvalue equation for each m may be generated by applying electromagnetic boundary conditions at the dielectric interfaces and the guiding and leaky modes of the structure may be readily obtained from the solutions to the eigenvalue equations. The guided modes, which are concentrated in the silica, satisfy $\text{Re}[\beta] > \omega/c$, $\text{Im}[\beta] = 0$. The leaky modes require analytic continuation to complex β values; only solutions which possess small imaginary β components are retained. At low values of m , $\text{Re}[\beta] \approx \omega/c$ for the leaky mode solutions and lies close to and just below the air light-line value $\text{Re}[\beta] < \omega/c$. At high values of m , low loss leaky "whispering gallery" modes, concentrated in or near the core boundary, can exist further from the light line in rings of sufficiently large radius and thickness.

The leaky air modes can be labelled in an analogous way to the guided modes of standard index guiding optical fibres. Of particular interest is the LP_{01} -like leaky mode, which is the analogue of the fundamental mode of a standard telecommunications fibre. The LP_{01} -like mode is found to have a concentration of light power within the central hole of the tube and has an approximately Gaussian field intensity profile close to the centre of the hole. The β -value of this mode lies close to the air light line, so that the air-silica interfaces act as strong reflectors of the light. This gives rise to strong confinement, as evidenced by the small value of $\text{Im}[\beta]$ associated with the mode. The LP_{01} -like leaky mode confinement, for a given tube radius R , is found to be strongly dependent upon the thickness t .

Figures 4a and 4b respectively show the linear and logged dependence of $\text{Im}[\beta]$ on thickness t , for mean tube radii of $6\mu\text{m}$ and $9\mu\text{m}$ and an operating wavelength $\lambda=1.55\mu\text{m}$. A tube radius of $6\mu\text{m}$ is close in size to the core radius of a seven-cell core defect fibre herein and a tube radius of $9\mu\text{m}$ is close in size to the core radius of a nineteen-cell core defect fibre herein, when both configured to guide light at $1.55\mu\text{m}$. The broad minimum occurring around $t=0.4\mu\text{m}$, and which is most apparent on the linear plot in Figure 4a, is believed to be due to an anti-resonance phenomenon. Clearly, the minimum is significantly lower for the $9\mu\text{m}$

tube, which indicates that the larger diameter tube is better able to confine light at this wavelength to the core. Destructive interference occurs for (Hankel) waves which are multiply reflected at the dielectric interfaces. The round-trip phase accumulated by a wave that emanates from the inner interface, propagates outwards to the outer interface, reflects and propagates inwards to the inner interface and is again reflected, is close to π . More generally, anti-resonances occur around thickness values giving rise to a round-trip phase given by $(2n+1)\pi$, where n is an integer satisfying $n \geq 0$. For example, in a silica and air system, for tube radii satisfying $R \gg \lambda$ (where λ is the operating wavelength), the thickness t which gives rise to anti-resonance is determined from

$$t = \frac{\lambda}{4\sqrt{n_{sil}^2 - 1}}(2n + 1), \quad (1)$$

where n_{sil} is the refractive index of silica. As can be seen, t is independent of the radius R . In this regime, the boundaries are acting as locally planar interfaces. More generally still, anti-resonances lie between resonances, which in this case occur at

$$t \approx \frac{\lambda}{4\sqrt{n_{sil}^2 - 1}}2n, \quad n \geq 1. \quad (2)$$

where n is an integer. At resonances, the field is maximised within the silica of the tube.

Equations (1) and (2), relate specifically to silica and air systems, although they can be generalised to describe other material and air systems by replacing n_{sil} with the refractive index of the respective material. Clearly, the position and scale of the graph in Figure 4, and respective thickness values for resonance and anti-resonance, vary as the material refractive index and operating wavelength vary. For example, as the material refractive index increases, the curve in Figure 4 would contract and shift to the left; with respective thickness values decreasing. Conversely, if the operating wavelength increases, the curve in Figure 4 would expand and shift to the right; with respective thickness values increasing.

The equations can be generalised for two materials having respective refractive indices n_{HI} and n_{LO} , according to

$$t = \frac{\lambda}{4\sqrt{n_{HI}^2 - n_{LO}^2}}(2n+1) \quad (3)$$

for anti-resonance and, for resonance

$$t \approx \frac{\lambda}{4\sqrt{n_{HI}^2 - n_{LO}^2}}(2n), n \geq 1 \quad (4)$$

In this case, it will be appreciated that the equations depend on both n_{HI} and n_{LO} , rather than the relatively high refractive index alone. The skilled person will appreciate that equations (3) and (4) may be modified to describe resonance and anti-resonance in systems where the tube comprises plural concentric constituent layers, or shells, for example a high refractive index outer shell and a lower refractive index inner shell. Such a structure may be useful for tuning the reflectivity of the inner or outer surface of the overall tube, for example, in order to equalise the reflectivities of the tube surfaces incident with core and cladding regions. Even more complex structures than this are envisaged. The skilled person will be able, if required, to adapt the foregoing equations to describe the resonance and anti-resonance properties of such structures.

In some embodiments of the present invention, the operating wavelength may be at or near 1550nm. The operating wavelength may be lower, for example at or near to 800nm, 1060nm or 1300nm. Alternatively, the operating wavelength may be higher, for example in the range 2-5 μ m (for example, for mid IR spectroscopy), or even at or near 10.6 μ m (for example, for transmitting light from a CO₂ laser).

Silica glass is not so optically transparent at wavelengths of light above about 2 μ m. For transmission at the longer wavelengths, therefore, it would be preferable to use a material that is optically transparent at the wavelengths of interest. Typically, glasses such as chalcogenides or tellurite, can have refractive indices in the region of 2.4 and above and can be optically transparent at wavelengths above 2 μ m. Of course, use of such high index glasses has a significant impact on Equations (1)-(4), and waveguide core boundary structures would need to be scaled according to the equations to be anti-resonant.

Figure 5 shows the mode field intensity I of the LP₀₁-like leaky mode for a tube with mean radius $R=6\mu$ m, thickness $t=0.392\mu$ m and wavelength 1.55 μ m, which corresponds to the exact anti-resonance minimum. Of course, to benefit from anti-resonance, it is not necessary

to operate at exact anti-resonance. Indeed, there is a broad range between resonance peaks where a waveguide benefits from a boundary tuned to have some degree of anti-resonance. It can be seen that a near null appears very close to the inner dielectric interface and that the intensity at the outer interface is 22dB lower than the intensity at the centre of the hole. This field suppression at the interfaces is a feature of anti-resonance. Exploitation of the anti-resonance phenomenon both maximises the confinement of the LP₀₁-like leaky mode and largely minimises the field at the boundaries and hence the interface roughness scattering (discussed below). Of course, any well-confined, leaky mode in the core, for example a TE₀₁-like mode, would benefit in the same way as the LP₀₁-like mode.

Figure 6 shows plots of the mode spectra of an anti-resonant tube of radius $R=6\mu\text{m}$ and $t=0.392\mu\text{m}$, including all guided modes and leaky modes within $\Delta\beta = 0.15\mu\text{m}^{-1}$ of the air light line at $\lambda=1.55\mu\text{m}$ (i.e. at $\beta=2\pi/1.55$), and compares it with the spectrum for a thinner silica ring of thickness $t=0.1\mu\text{m}$, which is the approximate thickness of a cladding structure vein according to a preferred structure, as described hereinafter. This range of β is chosen to correspond to the band-gap width of a typical PBG fibre cladding. It is seen that within this region, the thicker anti-resonant tube actually possesses a smaller number of modes than the thinner one. The interface field intensity reduction and the mode number reduction implies that mode coupling effects, due to fluctuations on a length scale exceeding about $20\mu\text{m}$, can be expected to be lower for a thicker anti-resonant boundary than a thinner one.

The inventors have applied the foregoing principles to a numerical investigation of continuous core surrounds, or boundaries, having shapes that are more easily fabricated in practice, for example a dodecagonal boundary as shown in Figure 7. The results are compared herein with the circular geometry.

At least initially, the boundary may be considered in the absence of any cladding material; it is taken to be bounded by air. The dodecagonal boundary, which is a natural core surround shape in PBG fibres manufactured using stacked silica tubes, as will be described hereinafter, is found to possess a LP₀₁-like leaky mode which shows an anti-resonance effect almost identical with that of a circular tube of the same mean radius. The confinement of this mode is found to be only very slightly compromised by the sharp corners associated with this geometry. A near null of the field intensity again occurs very close to the inner dielectric interface. The thickness at anti-resonance of this shape is very close to that of the circular tube. The number of guided and leaky modes of this shape at anti-resonance is found to be similar to that of the tube over the PBG region, although modes possessing faster azimuthal

variation (high effective m) are shifted significantly by the change in geometry and the confinement of leaky modes with high effective m is reduced by the appearance of corners.

The inventors have considered a full PBG fibre geometry, as shown in Figure 8, with band gap cladding material surrounding a continuous core boundary. It is found that the anti-

5 resonance phenomenon associated with the continuous core surround occurs for these structures also. This is evidenced by scanning over boundary thickness t and numerically calculating the LP₀₁-like mode solutions.

As a function of t , broad maxima in the fraction η of the light power in air are observed, together with broad minima in F-factor (described below), which measures field
10 intensity at the dielectric interfaces and gives a direct relative measure of the strength of small scale interface roughness scattering and provides an indication of the relative strength of mode coupling effects due to longer scale fluctuations.

In fact, the thickness for anti-resonance for the core surround bounded by air can be used as an indication of the boundary thickness required for anti-resonance in the PBG fibre
15 geometry, as will be demonstrated. The thickness t at anti-resonance for the latter geometry is found to be a little lower than for the former one. This difference is believed to be a function of the silica associated with the PBG cladding structure, which connects onto the outer surface of the boundary. In other words, the boundary has an 'effective thickness', which is typically greater than the actual thickness, where effective thickness will vary depending on the form of
20 the cladding which meets the outer surface of the boundary. Furthermore, examination of the mode field intensity of the LP₀₁-like mode shows that near nulls appear close to the inner surface of the boundary in the PBG fibre at maximum η and minimum F-factor, just as they do for the core surround in air at anti-resonance. This confirms the anti-resonance mechanism for PBG fibre geometry. Hence, F-factor, η and anti-resonance are proxies for one another in
25 that determining any one provides specific information about the other two.

According to a second aspect, the present invention provides an optical waveguide, comprising:

a core, comprising an elongate region of relatively low refractive index;

a photonic bandgap structure arranged to provide a photonic bandgap over a range of
30 wavelengths of light, the structure, in a transverse cross section of the waveguide, surrounding the core and comprising elongate relatively low refractive index regions interspersed with elongate relatively high refractive index regions; and

a relatively high refractive index boundary at the interface between the core defect and the photonic bandgap structure, the boundary having a thickness around the core such that, in use, light guided by the waveguide is guided in a transverse mode in which, in the transverse cross-section, more than 95% of the guided light is in the regions of relatively low refractive index in the waveguide.

As indicated, guiding light in a region of relatively low refractive index has the advantage that losses, nonlinear effects and other material effects are generally lower in such regions, particularly if the region is a region of air or a gas. Thus, preferably in the transverse cross-section, ever more of the light may be guided in the regions of relatively low refractive index in the PBG structure and the core: preferably more than 96%, 97%, 98%, 99%, 99.3%, 99.5% or even 99.9% of the light is in those regions.

The boundary may have a thickness such that, in use, light guided by the waveguide is guided in a transverse mode in which, in the transverse cross-section, more than 50% of the guided light is in the region of relatively low refractive index in the core. It is significant that the inventors have recognised that the light need not be in the core region for beneficial effects to be achieved. Thus, the boundary may have a shape such that, in use, light guided by the waveguide is guided in a transverse mode in which, in the transverse cross-section, more than 1% of the guided light is in the regions of relatively low refractive index in the photonic bandgap structure. It may be that still more of the guided light is in those regions in the structure: more than 2%, more than 5% or even more than 10% of the light may be in those regions.

The boundary may have a thickness such that, in use, light guided by the waveguide is guided in a transverse mode providing an F-factor of less than $0.23\mu\text{m}^{-1}$ for an operating wavelength of $1.55\mu\text{m}$, less than an equivalent F-factor value scaled for a different operating wavelength or less than $0.7\Lambda^{-1}$ for structures having a periodic cladding with a pitch Λ .

F-factor has been identified by the present inventors as a useful figure of merit which relates to how the guided light propagating in a PBG fibre is subject to scattering from small scale irregularities of the air-silica interfaces. F-factor is also believed to be a strong indicator of likely mode-coupling characteristics of a PBG-fibre.

Scattering due to small scale irregularities acts in addition to the Rayleigh scattering due to index inhomogeneity within silica, or any other such optical guiding medium. The latter loss mechanism is strongly suppressed in air-core PBG fibres, if most of the light power η is in air. It remains to ascertain the limit that hole interface scattering places on loss, given

that some interface roughness is always present. The amount of scattering associated with air-silica boundaries can be minimised by ensuring that impurities are eliminated during the draw process; such impurities can act as scattering (and absorption) centres directly, and can operate as nucleation sites for crystallite formation. With these imperfections removed, there

5 still remains interface roughness governed by the thermodynamics of the drawing process. The inventors believe that such fluctuations are likely to be difficult or impossible to remove altogether.

The Rayleigh scattering due to small scale roughness at the air-silica interfaces may be calculated by applying a perturbation calculation. The analysis has a simple interpretation in
10 terms of effective particulate scatterers distributed on the interfaces. If the root-mean square (RMS) height roughness is h_{rms} and the correlation lengths of the roughness along the hole direction and around the hole perimeter are L_z and L_ϕ respectively, then a typical scatterer has a volume $h_{\text{rms}} L_z L_\phi$. The induced dipole moment of the typical scatterer is then given by

$$15 \quad \mathbf{p} = \Delta\epsilon \mathbf{E}_0 h_{\text{rms}} L_z L_\phi \quad (5)$$

where $\Delta\epsilon$ is the difference in dielectric constant between silica and air, and \mathbf{E}_0 is the E-field strength at the scatterer. This induced dipole moment radiates a power, in the free space approximation, given by

20

$$P_{\text{sc}} = \frac{1}{12\pi} \left(\frac{\omega}{c} \right)^4 \left(\frac{\epsilon_0}{\mu_0} \right)^{1/2} |\mathbf{p}|^2 = \frac{1}{12\pi} \left(\frac{\omega}{c} \right)^4 \Delta\epsilon^2 h_{\text{rms}}^2 L_z^2 L_\phi^2 \left(\frac{\epsilon_0}{\mu_0} \right)^{1/2} |\mathbf{E}_0|^2. \quad (6)$$

The number density of particles on the interface will be $\sim 1/(L_z L_\phi)$ so that the total radiated power from a section of length L of the perturbed fibre will be approximately

25

$$P_{\text{rad}} \sim \frac{1}{12\pi} \left(\frac{\omega}{c} \right)^4 \Delta\epsilon^2 h_{\text{rms}}^2 L_z L_\phi L \left(\frac{\epsilon_0}{\mu_0} \right)^{1/2} \oint_{\text{hole perimeters}} ds |\mathbf{E}_0|^2 \quad (7)$$

The loss rate is thus given by

$$\gamma = \frac{P_{\text{rad}}}{P_0 L} \sim \frac{1}{6\pi} \left(\frac{\omega}{c} \right)^4 \Delta \varepsilon^2 h_{\text{rms}}^2 L_z L_\phi \left(\frac{\varepsilon_0}{\mu_0} \right)^{1/2} \frac{\oint_{\text{perimeters}}^{\text{hole}} ds |\mathbf{E}_0|^2}{\int dS (\mathbf{E}_0 \wedge \mathbf{H}_0^*) \cdot \hat{\mathbf{z}}} \quad (8)$$

where the incident power P_0 has been expressed as a Poynting flux.

Equation (8) shows that the mode shape dependence of the Rayleigh interface roughness scattering strength is governed by an F-factor, given by

$$F = \left(\frac{\varepsilon_0}{\mu_0} \right)^{1/2} \frac{\oint_{\text{perimeters}}^{\text{hole}} ds |\mathbf{E}_0(\mathbf{r}')|^2}{\int_{\text{k-section}} dS (\mathbf{E}_0 \wedge \mathbf{H}_0^*) \cdot \hat{\mathbf{z}}} \quad (9)$$

The inventors have found that a comparison of the interface scattering strength from guided modes of different fibres with similar interface roughness properties can be based purely on the F-factor. Indeed, the thermodynamic limit to surface roughness is not expected to vary significantly with the details of the fibre geometry, so that the F-factor can be used directly as a figure of merit for any fibre which has interfaces which cause scattering and contribute to loss.

According to a third aspect, the present invention provides an optical waveguide, comprising:

a core, comprising an elongate region of relatively low refractive index;

a photonic bandgap structure arranged to provide a photonic bandgap over a range of wavelengths of light, the structure, in a transverse cross section of the waveguide, surrounding the core and comprising elongate relatively low refractive index regions interspersed with elongate relatively high refractive index regions; and

a relatively high refractive index boundary at the interface between the core defect and the photonic bandgap structure, the boundary having a thickness around the core such that, in use, light guided by the waveguide is guided in a transverse mode providing an F-factor of less than $0.23\mu\text{m}^{-1}$ for an operating wavelength of $1.55\mu\text{m}$, less than an equivalent F-factor value scaled for a different operating wavelength or less than $0.7\Lambda^{-1}$ for structures having a periodic cladding and a pitch Λ .

Preferably, for any of the aforementioned waveguides, still lower F-factors are provided: less than $0.17\mu\text{m}^{-1}$, less than $0.1\mu\text{m}^{-1}$, less than $0.07\mu\text{m}^{-1}$, less than $0.06\mu\text{m}^{-1}$, less than $0.05\mu\text{m}^{-1}$, less than $0.033\mu\text{m}^{-1}$, less than $0.03\mu\text{m}^{-1}$, less than $0.027\mu\text{m}^{-1}$, less than

0.023 μm^{-1} , less than 0.02 μm^{-1} , less than 0.017 μm^{-1} , less than 0.013 μm^{-1} , less than 0.01 μm^{-1} , less than 0.0067 μm^{-1} , or even less than 0.0033 μm^{-1} are preferred (for an operating wavelength of 1.55 μm , (or equivalent scaled values for an alternative operating wavelength) - for a PBG fibre that has a periodic photonic bandgap structure, with a pitch Λ , these values scale

- 5 inversely with pitch and become less than 0.5 Λ^{-1} , less than 0.3 Λ^{-1} , less than 0.2 Λ^{-1} , less than 0.17 Λ^{-1} , less than 0.15 Λ^{-1} , less than 0.10 Λ^{-1} , less than 0.09 Λ^{-1} , less than 0.08 Λ^{-1} , less than 0.07 Λ^{-1} , less than 0.06 Λ^{-1} , less than 0.05 Λ^{-1} , less than 0.04 Λ^{-1} , less than 0.03 Λ^{-1} , less than 0.02 Λ^{-1} , or even less than 0.01 Λ^{-1} respectively. As has already been described, anti-resonance strength can be stronger for larger diameter core radii. Accordingly, core radius may be
- 10 varied to meet a required F-factor; where increased radius also enables decreased F-factor.

A more rigorous calculation of small scale interface roughness can be derived which takes into account the details of the surface roughness spectrum and deviations from the free space approximation. The latter effect is embodied by a local density of states (LDOS) correction factor appearing in the integrand of the numerator integral in equation (9). Ideally,

15 to minimise the interface loss, the field intensity of the guiding mode multiplied by the LDOS factor should be maintained as small possible at the interfaces. In practise, the LDOS correction is found to be small even for (silica/air) PBG fibres in comparison with the guided mode field intensity factor; so that the F-factor given in equation (9) may be used to compare the interface scattering strength from guided modes of different fibre designs.

- 20 The effect of the scattering from crystallites which have formed close to the air/silica interfaces can be calculated in a similar way to the geometrical roughness considered above. Assuming the number density per unit interface length and the size of the crystallites is independent of fibre design, again F-factor can be used directly to compare the interface scattering strengths.

- 25 The features next discussed may be found in embodiments of any one of the preceding three aspects of the invention (relating to anti-resonance, proportion η of light in the relatively low refractive index regions or F-factor).

According to the second aspect of the invention, the boundary may be anti-resonant at an operating wavelength of light. Additionally, or alternatively, the boundary may be a

30 reflector.

The boundary may have a substantially constant thickness around the core. Alternatively, the boundary may have a thickness that varies around the core. In either case, thickness variations at points where the cladding joins the boundary may be ignored for the

purposes of simplified analysis. The boundary may have a thickness that varies periodically around the core.

For core boundaries that vary in thickness, the core boundary may have a thickness t around a proportion y of the boundary, where $y > 0.5$. Indeed, y may be greater than 0.6, 0.7, 0.8, 0.9 or be substantially equal to 1.0.

In the transverse cross section, the photonic bandgap structure may comprise an array of the relatively low refractive index regions separated from one another by the relatively high refractive index regions. The array may be substantially periodic. Of course, the array need not be periodic, as described in the aforementioned paper by N. M. Litchinitser et al.

It is highly unlikely in practice that a photonic bandgap structure according to the present invention will comprise a 'perfectly' periodic array, due to imperfections being systematically or accidentally introduced into the structure during its manufacture and/or perturbations being introduced into the array by virtue of the presence of the core defect and/or boundary region. The present invention is intended to encompass both perfect and (purposely or accidentally) imperfect structures. Likewise, any reference to "periodic", "lattice", or the like herein, imports the likelihood of imperfection.

The array may be a substantially triangular array. Other arrays, of course, may be used, for example, square, hexagonal or Kagomé, to name just three.

The boundary region may comprise, in the transverse cross-section, a plurality of relatively high refractive index boundary veins joined end-to-end around the boundary between boundary nodes, each boundary vein being joined between a leading boundary node and a following boundary node, and each boundary node being joined between two boundary veins and to a relatively high refractive index region of the photonic bandgap structure.

At least some of the boundary veins may be substantially straight. In some embodiments, substantially all of the boundary veins are substantially straight. Alternatively, or additionally, at least some of the boundary veins may be bowed outwardly from, or inwardly towards, the core defect.

At least two of the higher index regions in the photonic bandgap structure may be connected to each other. Indeed, the higher index regions in the photonic bandgap structure may be interconnected.

The photonic bandgap structure may comprise an arrangement of isolated relatively low refractive index regions separated by connected regions of relatively high refractive index. The connected regions of relatively high refractive index may comprise an array of

veins, each vein being connected at each end thereof to a node, which, in turn, is connected to at least two other veins. The arrangement of nodes and veins may vary from this at the inner or outer periphery of the photonic band-gap structure. Each vein may have a characteristic thickness substantially at its mid-point between the two nodes to which it is connected.

5 The boundary may comprise, in the transverse cross-section, a plurality of relatively high refractive index boundary veins connected end-to-end around the boundary between neighbouring boundary nodes (with no intermediate boundary nodes), each boundary vein being connected between a leading boundary node and a following boundary node, and each boundary node being connected between two boundary veins and to a relatively high
10 refractive index region of the photonic bandgap structure. Then, each boundary vein may have a characteristic thickness substantially at the mid-point between the two boundary nodes to which it is connected. Preferably, more than a half of the boundary veins have a characteristic thickness at their mid-points, which is substantially the thinnest region along the vein.

15 It will be appreciated that, in practical fibres, it is difficult to control the fabrication process to achieve exact dimensions, for example, of core boundary thickness. However, as already indicated, the anti-resonance minima are quite broad, compared with resonances, which are characterised by sharp peaks at certain thicknesses of core boundary. Thus, a core boundary thickness in the region of an anti-resonance minimum, even if not exactly at the
20 minimum, will still provide an advantage over other waveguides.

The characteristic thickness of at least one boundary vein may be at least 110% of the characteristic thickness of a plurality of the veins in the array of veins in the photonic band-gap structure. For example, the characteristic thickness of a plurality of the boundary veins may be at least 110% of the characteristic thickness of a plurality of the veins in the array of
25 veins in the photonic band-gap structure. Indeed, the characteristic thickness of at least a majority of the boundary veins may be at least 110% of the characteristic thickness of at least a majority of the veins in the array of veins in the photonic band-gap structure.

In any event, the aforementioned boundary vein or veins may be even thicker than the aforementioned veins in the photonic band-gap structure. For example, the boundary vein or
30 veins may be at least 120%, 140%, 160% or 180% of the characteristic thickness of the respective cladding veins. The boundary veins may be thicker still, for example, they may be at least 200%, 220%, 240% or even thicker than the characteristic thickness of the respective cladding veins.

In some embodiments of the present invention, substantially all of the boundary veins are thicker than substantially all of the veins in the photonic band-gap structure.

The boundary veins may be thinner than the veins in the photonic band-gap structure. The boundary vein or veins may be at most 90%, 80%, 60%, 40% or even thinner than the
5 characteristic thickness of the respective cladding veins.

The array may have a characteristic primitive unit cell and a pitch Λ . For example, the pitch may be between three and six microns.

In a waveguide in which the photonic band-gap cladding is periodic and has a characteristic pitch Λ , the core boundary thickness may be expressed as a proportion of the
10 pitch. For example, the boundary may have a thickness t , wherein, $t = u\Lambda$ for a proportion of the boundary y , where $u > 0.06$ and $y > 0.5$. For example, u may be even greater, for example $u > 0.05, 0.07, 0.09, 0.1$, or 0.11 . Additionally, or alternatively, y may be greater, for example $y > 0.6, 0.7, 0.8, 0.9$ or may be substantially equal to 1.0 .

Generally, as already described with reference to Equation (3), in determining whether
15 a core boundary is anti-resonant, it is necessary to consider the operating wavelength of the waveguide and the refractive index contrast between the relatively high refractive index regions and the relatively low refractive index regions. Hence, it may be found convenient to express the core boundary thickness in terms of Equation (3). For example, the core boundary thickness may be characterised by t according to:

20

$$\frac{a\lambda}{4\sqrt{n_{HI}^2 - n_{LO}^2}} \leq t \leq \frac{b\lambda}{4\sqrt{n_{HI}^2 - n_{LO}^2}}$$

where $a=0.5$ and $b=1.75$. Clearly, this range of thickness values is below the first-order resonance peak ($m=1$), which has been shown to lie at around $t=0.74\mu\text{m}$. It is unlikely that core
25 boundary thicknesses beyond the first-order resonance peak will find practical application, since the region would be thick enough to become an efficient waveguide thus negating the possible advantages of having an anti-resonant boundary. With reference to the graphs in Figure 4, which relate to the specific case of a silica and air fibre operating at a wavelength of $1.55\mu\text{m}$, t is in the approximate range $0.2\mu\text{m}$ to $0.7\mu\text{m}$ inclusive, and the curve has a
30 minimum value at approximately $0.4\mu\text{m}$. Preferably, $a>0.5$, for example, a may be greater than or equal to $0.6, 0.7, 0.8, 0.9$ or 1.0 (and $b \geq a$). Independently, or in combination, $b<1.75$, for example, b may be less than or equal to $1.7, 1.6, 1.5, 1.4, 1.3, 1.2, 1.1$ or 1.0 (and $b \geq a$). It

may be desirable to specify a core boundary thickness that is to the right or left of the anti-resonant point, in which case $b \geq a > 1.0$ or $a \leq b < 1.0$ respectively. In a preferred embodiment, $a > 0.8$ and $b < 1.2$. In a more preferred embodiment, $a > 0.9$ and $b < 1.1$.

It is expected that, as fabrication processes improve, it will be possible to make a core boundary very close to a desired thickness. There may be reasons for making a core boundary with a thickness which is not optimum according to a strict anti-resonance analysis. One exemplary reason may be mode crossings, which can have deleterious effects of the transmission characteristics of a fibre, as will be discussed hereinafter.

The core may have, in the transverse cross-section, an area that is significantly greater than the area of at least some of the relatively low refractive index regions of the photonic bandgap structure. The core may have, in the transverse cross-section, an area that is greater than twice the area of at least some of the relatively low refractive index regions of the photonic bandgap structure. The core may have, in the transverse cross-section, an area that is greater than the area of each of the relatively low refractive index regions of the photonic bandgap structure.

The core may have, in the transverse cross-section, a transverse dimension that is greater than the pitch Λ of the photonic band-gap cladding.

The core may correspond to the omission of a plurality of unit cells of the photonic band-gap structure, for example, the core may correspond to the omission of three, four, six, seven, ten, twelve or nineteen unit cells of the photonic band-gap structure. The core may correspond to the omission of more than nineteen unit cells of the photonic band-gap structure, for example thirty-seven cells.

At least some of the relatively low refractive index regions may have a refractive index of less than 2, less than 1.8, less than 1.6, less than 0.5, less than the refractive index of silica, less than 1.4, less than 1.3, less than the refractive index of typical polymer glasses (for example, less than 1.25), less than 1.2 or even less than 1.1 or even less than 1.05, or be 1. For example, at least some of the relatively low refractive index regions may comprise a solid material or may be voids filled with air or under vacuum. Alternatively, at least some of the relatively low refractive index regions may be voids filled with a liquid or a gas other than air. The region of relatively low refractive index that makes up the core may comprise the same or a different material compared with the regions of relatively low refractive index in the photonic bandgap structure.

In some embodiments, at least some of the relatively high refractive index regions comprise silica glass. The glass may be un-doped or doped with index raising or lowering dopants. Alternatively, the relatively high refractive index may comprise another solid material, for example a different kind of glass or a polymer.

5 The relatively low refractive index regions may make up more than 75% by volume of the photonic bandgap structure. This volume may be above 80%, for example 87.5%, or may be above 90%. The waveguide may support a mode having a mode profile that closely resembles the fundamental mode of a standard optical fibre. An advantage of this is that the mode may readily couple into standard, single mode optical fibre.

10 Alternatively, or in addition, the waveguide may support a non-degenerate mode. This mode may resemble a TE_{01} mode in standard optical fibres.

Preferably, in either case, said mode supports a maximum amount of the mode power in relatively low refractive index regions compared with other modes that are supported by the waveguide.

15 According to a fourth aspect, the present invention provides an optical fibre comprising a waveguide according to any of the first three aspects of the present invention.

As will be described hereinafter, embodiments of the present invention provide an optical fibre, of the aforementioned kind, wherein the loss of the optical fibre may be less than 5dB/km. According to a preferred embodiment of the present invention, the loss may be less
20 than 2db/km.

According to a fifth aspect, the present invention provides an optical fibre transmission system comprising a transmitter, a receiver and an optical fibre, according to the fourth aspect of the present invention, for transmitting light between the transmitter and the receiver.

25 According to a sixth aspect, the present invention provides data conditioned by having been transmitted through a waveguide or transmission system, as described above. As in any transmission system, data that is carried by the system acquires a characteristic 'signature' determined by a transfer function of the system. By characterising the system transfer function sufficiently accurately, using known techniques, it is possible to match a model of the
30 input data, operated on by the transfer function, with real data that is output (or received) from the transmission system.

Also according to the invention there is provided a method of forming an elongate waveguide, comprising the steps:

forming a preform stack by stacking a plurality of elongate elements;
 omitting, or substantially removing at least one elongate element from an inner region
 of the stack; and
 heating and drawing the stack, in one or more steps, into a waveguide of a type
 5 described above as being according to the invention.

Also according to the invention there is provided a method of forming elongate
 waveguide for guiding light, comprising the steps:

simulating the waveguide in a computer model, the waveguide comprising a core,
 comprising an elongate region of relatively low refractive index and a photonic bandgap
 10 structure arranged to provide a photonic bandgap over a range of wavelengths of light, the
 structure comprising elongate regions of relatively low refractive index interspersed with
 elongate regions of relatively high refractive index, including a boundary region of relatively
 high refractive index that surrounds, in a transverse cross-section of the waveguide, the core,
 wherein properties of the boundary region are represented in the computer model by
 15 parameters;

finding a set of values of the parameters that, according to the model, increases or
 maximises how much of the light guided by the waveguide is in the regions of relatively low
 refractive index in the waveguide; and

making a waveguide using the values.

20 Also according to the invention, there is provided a method of forming elongate
 waveguide for guiding light, comprising the steps:

simulating the waveguide in a computer model, the waveguide comprising a core,
 comprising an elongate region of relatively low refractive index and a photonic bandgap
 structure arranged to provide a photonic bandgap over a range of frequencies of light, the
 25 structure comprising elongate regions of relatively low refractive index interspersed with
 elongate regions of relatively high refractive index, including a boundary region of relatively
 high refractive index that surrounds, in a transverse cross-section of the waveguide, the core
 wherein properties of the boundary region are represented in the computer model by
 parameters;

30 finding a set of values of the parameters that, according to the model, decreases or
 minimises the F-factor of the waveguide; and

making a waveguide using the values.

According to a further aspect, the present invention provides a photonic crystal fibre, comprising:

an elongate, relatively low refractive index core;

an elongate photonic bandgap structure surrounding the core and comprising, in the
5 transverse cross section, a lattice of relatively low refractive index regions separated by connected relatively high refractive index regions; and

a concentric boundary region, at the interface between the core and the photonic bandgap structure, the core boundary region being generally thicker around its circumference than regions of relatively high refractive index in the photonic bandgap structure.

10 According to a further aspect, the present invention provides an optical waveguide comprising:

a core, comprising an elongate region of relatively low refractive index;

an outer structure, surrounding, in a transverse cross section of the waveguide, the core and comprising elongate relatively low refractive index regions interspersed with
15 elongate relatively high refractive index regions; and

a relatively high refractive index boundary at the interface between the core defect and the outer structure, the boundary having a thickness around the core such that the boundary is substantially anti-resonant at the operating wavelength of light.

The outer structure may be a photonic bandgap structure. Even if the outer structure is
20 not a photonic bandgap structure, any features set out above in relation to other aspects of the invention having a bandgap structure may be found in the present further aspect of the invention unless that is not physically meaningful. The waveguide may comprise a jacket around the outer structure.

Other aspects and embodiments of the present invention will become apparent from
25 reading the following description and claims and considering the following drawings.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, of which:

Figure 1 is a diagram of a transverse cross section of a PBG fibre structure having a generally constant thickness core boundary;

30 Figure 2 is a diagram of a transverse cross section of a PBG fibre structure having a varying thickness core boundary;

Figure 3 is a diagram which shows in transverse cross section of a circular tube of silica in air;

Figure 4 is a graph which shows the imaginary part of the longitudinal propagation constant β plotted as a function of tube thickness t on (a) a linear and (b) a log. y-axis scale;

Figure 5 is a graph which shows the radial dependence of the LP_{01} -like leaky mode field intensity for an anti-resonant-silica tube of the kind shown in Figure 2;

5 Figure 6 shows the mode spectra of silica tubes of radius R at thicknesses $t=0.392\mu\text{m}$ and $t=0.1\mu\text{m}$;

Figure 7 is a diagram which illustrates the geometry of a dodecagonal core surround;

Figures 8a and 8b are diagrams of transverse cross sections of PBG fibre structures of the kind used in embodiments of the present invention, wherein the structured illustrated in

10 Figure 8a has a seven-cell core defect and the structure illustrated in Figure 8b has a nineteen-cell core defect;

Figures 9a and 9b are graphs which show light power in air and F-factor respectively for seven-cell PBG fibre structures having different boundary thicknesses and Figure 9c is a graph of F-factor for nineteen-cell PBG fibre structures having different boundary

15 thicknesses;

Figures 10a and 10b are diagrams illustrating arrangements of capillaries and rods used in forming waveguide structures according to embodiments of the present invention;

Figures 11a and 11b are scanning electron micrographs of a seven-cell core defect structure and a nineteen-cell core defect structure made from pre-forms according to Figures

20 10a and 10b respectively;

Figure 12 is a graph showing transmission loss plotted against wavelength for the fibre shown in transverse cross section in Figure 11b;

Figure 13 is a diagram of an alternative embodiment of the present invention; and

Figure 14 is a diagram of another alternative embodiment of the present invention.

25 Figure 8a is a representation of an inner region of a PBG fibre waveguide structure of the kind used in embodiments of the present invention, shown in transverse cross-section. In the Figure, the black regions represent fused silica glass and the white regions represent air holes in the glass. As illustrated, the cladding 100 comprises a triangular array of generally hexagonal cells 105, surrounding a seven-cell core defect 110. This region of the cladding,

30 although not shown in its entirety, typically extends outwardly to provide a specified degree of light confinement; where more cladding layers provide increased confinement. Typically, although not shown, there are further cladding layers surrounding the photonic band-gap structure. There may be an additional solid silica layer to provide strength and a coating layer

to protect the silica and prevent light entering the fibre from the side, as in a normal fibre. A core defect boundary 145 is at the interface between the cladding and the core defect. The core defect boundary has twelve sides - alternating between six relatively longer sides 140 and six relatively shorter sides 130 - and is formed by omitting or removing seven central
 5 cells; an inner cell and the six cells that surround the inner cell. The cells would have typically been removed or omitted from a pre-form prior to drawing the pre-form into the fibre. As the skilled person will appreciate, although a cell comprises a void, or a hole, for example filled with air or under vacuum, the voids or holes may alternatively be filled with a gas or a liquid or may instead comprise a solid material that has a different refractive index
 10 than the material that surrounds the hole. Equally, the silica glass may be doped or replaced by a different glass or other suitable material such as a polymer. For the sake of simplicity of description herein, however, the following exemplary embodiments are silica and air fibres.

The waveguide of Figure 8a has a substantially periodic structure, comprising a triangular lattice of generally hexagonal holes. However, as already discussed, N. M.
 15 Litchinitser *et al.* have demonstrated that photonic bandgaps may be achieved in non-periodic structures. The properties of the core-cladding boundary are also important in non-periodic PBG structures and the invention is not limited to substantially periodic structures but encompasses structures with some or even a high degree of aperiodicity or irregularity in the cladding structure. However, the exemplary embodiments illustrated hereafter use a
 20 triangular lattice of the kind shown in Figure 8a, which will be familiar to the skilled artisan, in order not to obscure the present invention.

Hereafter, and with reference to Figure 8a, a region of glass 115 between any two holes is referred to as a "vein" and a region of glass 120 where three veins meet is referred to as a "node". A vein can be generally characterised by its transverse, cross-sectional length
 25 and thickness at a midpoint between the two nodes to which it is attached. Veins tend to increase in thickness from their midpoint to the nodes, although a region of substantially constant thickness at the middle of the vein tends to appear and then increase in length with increasing air-filling fraction. Nodes can be generally characterised by a transverse cross-sectional diameter, which is the diameter of the largest inscribed circle that can fit within the
 30 node. In the fibre structures investigated herein, node diameter is typically larger than the thickness of the veins attached to the node.

The core defect boundary 145 comprises the inwardly-facing veins of the innermost ring of cells that surround the core defect 110.

In practice, for triangular lattice structures that have a large air-filling fraction, for example above 85%, most of the cladding holes 105 assume a generally hexagonal form, as shown in Figure 8a, and the veins are generally straight.

The cells forming the innermost ring around the boundary of the core defect, which

5 are referred to herein as “**boundary cells**”, have one of two general shapes. A first kind of boundary cell 125 is generally hexagonal and has an innermost vein 130 that forms a relatively shorter side of the core defect boundary 145. A second kind of boundary cell 135 has a generally pentagonal form and has an innermost vein 140 that forms a relatively longer side of the core defect boundary 145.

10 There are twelve boundary cells 125, 135 and twelve nodes 150, which are referred to herein as “**boundary nodes**”, around the core defect boundary 145. Specifically, as defined herein, there is a boundary node 150 wherever a vein between two neighbouring boundary cells meets the core defect boundary 145. In Figure 8a, these boundary nodes 150 have slightly smaller diameters than the cladding nodes 160. For the present purposes, the veins
15 130 & 140 that make up the core defect boundary are known as “**boundary veins**”.

Figure 8b is a diagram of an exemplary nineteen-cell core defect structure. Other than the size of the core defect, the structure has the same cladding properties as the structure shown in Figure 8a.

In both structures, the core defect boundary 145 can be thought of as a generally
20 annular, constant thickness region of glass surrounding the core region 110 and acting to provide confinement of light to the core independently of, but in addition to, the photonic band-gap structure that forms the inner cladding region 100. Clearly, the boundary region is not perfectly annular, due to it being formed from plural, generally straight boundary veins, and is not of constant thickness, due to slight variations in thickness along boundary veins
25 and, in particular, at boundary nodes. However, for the present purposes herein, this kind of core boundary will be thought of as being generally annular and of generally constant thickness.

In the prior art, photonic band-gap fibres typically comprise either plural concentric layers of dielectric material surrounding a core, to form an omni-directional waveguide, or a
30 microstructured photonic band-gap cladding, comprising a triangular lattice of hexagonal holes, surrounding a core region. In the latter kind of band-gap fibre, there is a core defect boundary but the shape and form of the boundary has typically been a simple function or artefact of the pre-form and manufacturing process used to make the fibre. Certainly, there

are no prior art band-gap fibres of the kind presented in the exemplary embodiments herein, in which a generally annular core boundary region, which is produced to be substantially anti-resonant, sits at the interface between a core region and a periodic, microstructured photonic band-gap cladding structure.

5 The structures in Figure 8a and 8b, and each of the following examples of different structures, closely resemble practical optical fibre structures, which have either been made or may be made according to known processes or the processes described hereinafter. The structures have the following characteristics in common (unless otherwise stated):

10 a pitch Λ of the cladding chosen between values of approximately $3\mu\text{m}$ and $6\mu\text{m}$ (this value may be chosen to position core-guided modes at an appropriate wavelength for a particular application);

 a thickness t of the cladding veins (at their mid-points) of 0.0548 times the chosen pitch Λ of the cladding structure (or simply 0.0548Λ);

 an air-filling fraction η in the cladding of approximately 87.5%.

15 As described above, the present inventors have determined that it is possible to control the performance of PBG fibres in particular by minimising the F-factor or maximising the amount of light that propagates in air within the fibre structure, even if some light is not in the core, in order to benefit from the properties of PBG fibres, such as reduced absorption, non-linearity and, in addition, reduced mode coupling. As has been described, light in air and F-
20 factor are proxies to anti-resonance exhibited by the core boundary.

 To this end, the inventors have analysed a significant number of, both, seven-cell and nineteen-cell core defect PBG fibres in which only the thickness of the boundary veins has been varied; from 1.4 times the thickness of the cladding veins to 2.4 times the thickness of the cladding veins, in steps of 0.1 times the thickness of the cladding veins for the seven cell
25 defect fibres and from 0.7 times the thickness of the cladding veins to 2.5 times the thickness of the cladding veins, in steps of 0.1 times the thickness of the cladding veins the nineteen-cell core defect fibres.

 All boundary vein thicknesses are measured at their centre points between the two boundary nodes to which they are attached. It is evident that even relatively thick boundary
30 veins are slightly thicker at the point where they meet the boundary nodes than at their mid-points between nodes. However, for the purpose of stating boundary vein thickness, the thickness of the vein at its centre is used and the slightly increased thickness of the boundary veins at their ends is ignored.

The ranges of boundary thickness values sampled include the theoretical anti-resonant point, which is somewhere between 2.1 and 2.3 times the thickness of the cladding veins (equivalent to $0.371\text{--}0.407\mu\text{m}$); the anti-resonant point being at an approximate thickness of $0.4\mu\text{m}$ according to the graphs in Figure 4. Specific details of the seven-cell-core-defect structures are provided in Table 1 below.

| Boundary vein thickness relative to: | | | | | |
|--------------------------------------|--------------------------|------------------------------------|--------------------------------------|-------------------------------|-----------------------------|
| Cladding vein thickness (%) | Cladding pitch Λ | Operating wavelength λ (%) | Absolute thickness (μm) | Light power in air η (%) | F-factor (Λ^{-1}) |
| 140 | 0.077 | 16.0 | 0.248 | 92 | 1.68 |
| 150 | 0.082 | 17.1 | 0.266 | 97 | 0.67 |
| 160 | 0.088 | 18.3 | 0.283 | 98 | 0.38 |
| 170 | 0.093 | 19.4 | 0.301 | 98 | 0.34 |
| 180 | 0.099 | 20.5 | 0.318 | 99 | 0.23 |
| 190 | 0.104 | 21.7 | 0.336 | 99 | 0.23 |
| 200 | 0.110 | 22.8 | 0.354 | 98 | 0.29 |
| 210 | 0.115 | 24.0 | 0.371 | 97 | 0.46 |
| 220 | 0.121 | 25.1 | 0.389 | 90 | 1.17 |
| 230 | 0.126 | 26.3 | 0.407 | 89 | 1.06 |
| 240 | 0.132 | 27.4 | 0.425 | 95 | 0.57 |

Table 1.

In Table 1, boundary vein thickness is presented in four alternate ways. The first column shows boundary vein thickness relative to cladding vein thickness. The second column shows boundary vein thickness relative to the selected pitch Λ of the cladding structure. The third column shows boundary vein thickness as a function of the selected operating wavelength λ . These three measures are scalable and remain the same for a broad range of PBG fibre structure pitches and operating wavelengths for structures within the same bandgap. The fourth column shows absolute boundary vein thickness in μm for an operating wavelength of $1.55\mu\text{m}$ and may be scaled according to Equations (1) and (2)..

The fifth and sixth columns show values for percentage of light power in air η and F-factor respectively for the eleven structures. F-factor is shown in terms of Λ^{-1} and is thus relevant to PBG fibres with periodic cladding structures. It is easy to calculate absolute F-factor in terms of μm^{-1} for an absolute wavelength of $1.55\mu\text{m}$ by dividing the F-values by 3 (since pitch is selected to be about $3\mu\text{m}$ for a $1.55\mu\text{m}$ operating wavelength).

The light-in-air and F-factor of a particular structure is directly measurable. The method of measuring light-in-air involves taking a near-field image of light as it leaves the structure, overlaying it on a scanning electron micrograph (SEM) or atomic force microscopy (AFM) image of the structure and directly calculating the % light-in-air from the overlap of the two images, although care needs to be taken since the field can vary rapidly across the boundary between air and glass. Such techniques will be readily apparent to those skilled in the art of optical fibre measurement techniques.

The light-in-air and F-factor can also be calculated more indirectly for a real fibre structure by the following method. A SEM or AFM image is taken of the cross-sectional structure of the fibre in question. An accurate representation of the structure, suitable for use in computer modelling, is obtained from the SEM by estimating the position of the structural boundaries throughout the cross-section. Based on this representation, the mode field can be simulated by solving Maxwell's vector wave equation for the fibre structure, using known techniques. In brief, Maxwell's equations are recast in wave equation form and solved in a plane wave basis set using a variational scheme. An outline of the method may be found in Chapter 2 of the book "Photonic Crystals – Molding the Flow of Light", J.D. Joannopoulos et al., ©1995 Princeton University Press. This knowledge of the electric and magnetic field distributions enables both the numerator and denominator in Equation (9) above to be calculated. The fraction η of light in air may also be calculated by superimposing the modelled mode on the modelled structure.

The very small size of the thin veins in the structure means that great care must be taken when interpreting an SEM image. The apparent thickness of a vein in the image may be slightly different from the true thickness, but the small discrepancy will have a large impact on the light-in-air and F-factors determined from it. It is therefore advisable to confirm the validity of the process by which the model structure is determined from the SEM image, to yield a reliable fit. One way to confirm the fit would be through spectral measurements of the loss of the fibre, which often show peaks at particular wavelengths due to mode crossings

[see, for example, Smith *et al.*, "Low-loss hollow-core silica/air photonic bandgap fibre", Nature, Vol. 424 pp 657-659, 7 August 2003].

The values for light power in air η and F-factor for a seven cell core defect fibre are plotted in the graphs in Figures 9a and 9b respectively. The horizontal axes of these plots are labelled as a core boundary thickness in terms of a percentage of the selected operating wavelength, 1550nm. In generating the plots of Figures 9a and 9b, the fibre structure of Figure 8a was modelled on a computer and the proportion of light in air η and the F-factor were calculated for various boundary vein thicknesses t . Each point in the plots represents one thickness, according to the values in Table 1.

Similarly, the values of F-factor for nineteen-cell core defect structures having varying core boundary thicknesses are plotted in the graph in Figure 9c. This time, the horizontal axis of the plot is labelled as a core thickness in terms of a percentage of the cladding vein thickness. A graph of light in air for these structures is not shown, since it is evident that it would substantially mirror the F-factor graph. However, the highest identified light in air value, which is coincident with the lowest F-factor value, is in the region of 99.7%.

The plots demonstrate that η and F-factor vary considerably with core boundary vein thickness even over the relatively small range of thickness values modelled. In particular, the maximum value for η and the minimum value of F-factor, for the seven cell core defect structures, appear for boundary vein thicknesses in the range 0.3-0.37 μm . This range is slightly below the modelled anti-resonant boundary thickness of 0.392 μm for the 6 μm tube.

Referring to the graph in Figure 9c, the optimum value of core boundary thickness for a nineteen cell core defect is in the range 0.354-0.425 μm , which encompasses the modelled anti-resonant point for a 9 μm tube.

The simple circular core surround model for the properties of the fundamental guiding mode of band gap fibres is found to be more accurate for nineteen-cell core defects than for seven-cell core defect, and becomes increasingly accurate when the core boundary thickness approaches an optimum anti-resonance value. This is because the field intensity of the normalized fundamental guided mode outside the core boundary and air core region becomes smaller as the core size is increased and anti-resonance is approached. The field of the fundamental mode is then less perturbed by the cladding: the effect of the cladding is simply to render the small field component which remains exterior to the core surround evanescently decaying. As has already been mentioned, the slight non-circularity of the core surround in

practical fibres is found not to significantly change the properties of the fundamental guiding mode from that of a perfectly circular geometry.

Following on from this, it will be apparent that different cladding structures, in which different numbers or shapes of boundary vein (or, indeed, other forms of relatively high refractive index material) meet the core boundary, will cause the effective boundary thickness to vary for a given absolute boundary vein thickness. While it might be relatively complex to model exact anti-resonance for such boundaries, which may differ significantly from a tube or even a dodecagon, by following the teachings provided herein, the skilled person will be able to calculate η or F-factor and use either one as a proxy to design an anti-resonant boundary.

In considering in more detail the shape of the curve in Figures 9a (light in air fraction) and 9b (F-factor), it is apparent that local minima of the former and maxima of the latter occur at around 16% and 25% of the operating wavelength λ . The present inventors do not believe, however, that these spikes coincide with resonances of the core boundary. By substituting an operating wavelength of 1550nm into Equation (2), the first-order resonance peak should occur at an absolute boundary thickness of around $0.74\mu\text{m}$, which equates to a value of around 48.4% of the operating wavelength. Clearly, this value is significantly higher than either value associated with the spikes in Figures 9a and 9b. The present inventors suggest that the spikes are due to interactions between the mode being investigated and so-called surface modes near to the core boundary. This kind of interaction is also identified in Müller, D. *et al.* "Measurement of photonic band-gap fiber transmission from 1.0 to 3.0 μm and impact of surface mode coupling." *QTuL2 Proc. CLEO 2003* (2003). This paper supports the present inventors' view that mode power from the air-guided modes may couple to lossy surface modes, which concentrate in or near to the core boundary. The result is increased loss, attendant increased F-factor and reduced light in air fraction. Indeed, it is found using the previously described circular core surround model that such mode crossings are suppressed for core thicknesses close to the anti-resonant value, but become abundant for core thicknesses away from anti-resonance. This surface mode exclusion property associated with the anti-resonance renders the curves for F-factor and amount of light in air smoother as they reach optimum values at core boundary thicknesses close to the anti-resonant point.

In order to remove the peaks, it is either necessary to remove the surface states or adjust the operating point of the waveguide to avoid mode crossings. Moving the operating point for a given geometry can be achieved by varying the operating wavelength within the band gap and/or adjusting the pitch Λ of the photonic band-gap structure. Clearly the

avoidance of mode crossings facilitated by a core surround close to anti-resonance will typically enable a wider wavelength bandwidth to be of practical use.

Figure 10a illustrates one way of arranging a stack of capillaries 1200 to be drawn into a pre-form and fibre of the kind that is exemplified by Figure 8. The cladding is formed by stacking round cross-section capillaries 1205 in a close-packed, triangular lattice arrangement. The cladding capillaries 1205 have an outer diameter of 1.04mm and a wall thickness of 40µm. The inner region 1210 of the stack contains a large diameter capillary 1215 having an outer diameter of 4.46mm and a wall thickness of 105µm. The large diameter capillary 1215 supports the cladding capillaries while the stack is being formed and eventually becomes part of the material that forms a core defect boundary 145. The resulting structure, as shown in the SEM image of Figure 11a, has a boundary wall thickness in the region of 7% of the pitch, which is slightly below the optimum region for anti-resonance.

Interstitial voids 1220 that form at the locus of each close-packed, triangular group of three cladding capillaries are each packed with a glass rod 1225, which has an outer diameter of 0.498mm. The rods 1225 are inserted into the voids 1220 after the capillaries have been stacked. The rods 1225 that are packed in voids 1220 assist in forming cladding nodes 160, which have a diameter that is significantly greater than the thickness of the veins that meet at the nodes. Omission of a rod from a void in the cladding would lead to the formation of a cladding node that has a significantly smaller diameter.

The stack 1200 is arranged as described with reference to Figure 10a and is then over-clad with a further, relatively thick walled capillary (not shown), which is large enough to contain the stack and, at the same time, small enough to hold the capillaries and rods in place. The entire over-clad stack is then heated and drawn into a pre-form, during which time all the interstitial voids at the boundary, and remaining voids between the glass rods and the cladding capillaries, collapse due to surface tension. The pre-form is, again, over-clad with a final, thick silica cladding and is heated and drawn into optical fibre in a known way. If surface tension alone is insufficient to collapse the interstitial voids, a vacuum may be applied to the interstitial voids of the pre-form, for example according to the process described in WO 00/49436 (The University of Bath).

The thickness of the boundary resulting from the stack in Figure 10a is readily varied by using different thicknesses of large diameter capillary 1215.

Figure 10b is a diagram of a stack, similar to the stack shown in Figure 10a, but this time suitable for making a nineteen-cell core defect fibre. As shown, an inner region of the

stack is supported around a thick walled, relatively large capillary, in place of nineteen cladding capillaries; an inner capillary, the six capillaries that surround the inner capillary and the twelve capillaries that surround the six capillaries. The cladding capillaries have an outside diameter of about 1.8mm and a wall thickness of about 50 μ m and the core tube has an
 5 outside diameter of about 7.6mm and a wall thickness of about 300 μ m.

The stack shown in Figure 10b can be drawn down (including by applying appropriate pressures to the various holes in the pre-form) to produce a fibre as shown in the SEM image in Figure 11b. The cladding of the fibre has a pitch Λ in the region of about 3.75-3.83 μ m, a core diameter of about 17.7 μ m and an average core thickness of about 0.09-0.1 Λ , an AFF of
 10 about 0.92 (92%) and a value of d/Λ of about 0.97.

According to the plots in Figures 4a, 4b and 9c, the anti-resonance point for a nineteen-cell core defect fibre is in the region of 0.4 μ m (or 0.12 Λ). The core boundary thickness for the fibre structure shown in Figure 11b, therefore, is slightly below the anti-resonant point. In order to make a thicker core boundary, therefore, it would be necessary to
 15 use similar fibre drawing conditions and a slightly thicker, large diameter, inner tube in the stack.

The graph in Figure 12 is a plot of loss (in dB/km) against wavelength for the fibre shown in the image of Figure 11b. The plot was generated using an optical spectrum analyser to measure transmitted power through a length of more than 1km of fibre, and various cut-
 20 back lengths. As can be seen, the loss is in the region of 2dB/km over a significant band of wavelengths about a centre frequency of about 1566nm. Such a low loss has, hitherto, not been reported for hollow core photonic band-gap fibres. The lowest previously-reported loss is 13dB/km. The present fibre exhibits such a low loss while not even having an optimum core boundary thickness. The present inventors are confident that a similar fibre having a
 25 slightly thicker core boundary, which is nearer to the anti-resonance point and has an attendant lower F-factor, will achieve an even lower loss, for example even lower than 1dB/km. In addition, with reference to the SEM image in Figure 11b, there is clearly scope to improve the uniformity of the photonic band-gap structure in the fibre. Improved uniformity, both in the transverse and longitudinal planes, is reported in the prior art as a means to
 30 significantly reduce loss in band-gap fibres. The present inventors agree and believe that increased uniformity will lead to significant reductions in loss, for example to below 0.5dB/km or even below 0.2dB/km, which is the approximate loss of standard, single mode optical fibre.

Figure 13 is a diagram of an alternative embodiment of the present invention in which a dodecagonal core boundary varies in thickness about the core, with the longer boundary veins being thicker than the shorter ones. The effective thickness of the boundary is a function of the two thickness of boundary vein and their respective lengths as well as the silica that joins to the outer surface of the boundary at boundary nodes.

Figure 14 is a diagram of a further alternative embodiment of the present invention in which a dodecagonal core boundary has alternating short, thin core boundary veins and long, generally elliptical boundary veins, where the minor axis (or thickness) of the ellipses is significantly longer than the thickness of the shorter sides. Hence, the effective thickness of the boundary is a function of the two kinds of boundary vein as well as the silica that joins to the outer surface of the boundary at boundary nodes.

The PBG fibre structures shown in Figures 13 and 14 may be manufactured using known stack and draw methods, wherein preforms are prepared with additional silica rods in regions requiring greater volumes of silica in the final fibre.

The skilled person will appreciate that the various structures described above may be manufactured using the described manufacturing process or a prior art processes. For example, rather than using a stacking and drawing approach to manufacture, a pre-form may be made using a known extrusion process and then that pre-form may be drawn into an optical fibre in the normal way.

In addition, the skilled person will appreciate that while the examples provided above relate exclusively to PBG fibre cladding structures comprising triangular arrays, the present invention is in no way limited to such cladding structures. For example, the invention could relate equally to square lattice structures, or structures that are not close-packed. In general, the inventors propose that given a cladding structure that provides a PBG and a core defect in the cladding structure that supports guided modes, the form of the boundary at the interface between the core defect and the cladding structure will have a significant impact on the characteristics of the waveguide, as described herein.

The skilled person will appreciate that the structures described herein fit on a continuum comprising a huge number of different structures, for example having different combinations of core defect size, boundary vein thickness and, in general, boundary and cladding form. Clearly, it would be impractical to illustrate each and every variant of PBG waveguide structure herein. In particular, where numerical values or ranges of values are given herein for a particular parameter, all combinations with values or ranges of values of

other parameters given herein are disclosed unless such combinations are not physically possible. As such, the skilled person will accept that the present invention is limited in scope only by the present claims.

CLAIMS

1. An optical waveguide, comprising:

--- a core, comprising an elongate region of relatively low refractive index; ---

5 a photonic bandgap structure arranged to provide a photonic bandgap over a range of wavelengths of light including an operating wavelength of light, the structure, in a transverse cross section of the waveguide, surrounding the core and comprising elongate relatively low refractive index regions interspersed with elongate relatively high refractive index regions; and

10 a relatively high refractive index boundary at the interface between the core defect and the photonic bandgap structure, the boundary having a thickness around the core such that the boundary is substantially anti-resonant at the operating wavelength of light.

2. An optical waveguide, comprising:

a core, comprising an elongate region of relatively low refractive index;

15 a photonic bandgap structure arranged to provide a photonic bandgap over a range of wavelengths of light, the structure, in a transverse cross section of the waveguide, surrounding the core and comprising elongate relatively low refractive index regions interspersed with elongate relatively high refractive index regions; and

a relatively high refractive index boundary at the interface between the core defect and
20 the photonic bandgap structure, the boundary having a thickness around the core such that, in use, light guided by the waveguide is guided in a transverse mode in which, in the transverse cross-section, more than 95% of the guided light is in the regions of relatively low refractive index in the waveguide.

3. A waveguide as claimed in either preceding claim, in which the boundary has a
25 thickness such that, in use, light guided by the waveguide is guided in a transverse mode in which, in the transverse cross-section, more than 1% of the guided light is in the regions of relatively low refractive index in the photonic bandgap structure.

4. A waveguide as claimed in any preceding claim, in which the boundary has a thickness such that, in use, light guided by the waveguide is guided in a transverse mode in
30 which, in the transverse cross-section, more than 50% of the guided light is in the region of relatively low refractive index in the core.

5. A waveguide as claimed in any preceding claim, in which the boundary has a thickness such that, in use, light guided by the waveguide is guided in a transverse mode

providing an F-factor of less than $0.23\mu\text{m}^{-1}$ for an operating wavelength of $1.55\mu\text{m}$, less than an equivalent F-factor value scaled for a different operating wavelength or less than $0.7\Lambda^{-1}$ for structures having a periodic cladding and a pitch Λ .

6. An optical waveguide, comprising:

5 a core, comprising an elongate region of relatively low refractive index;

a photonic bandgap structure arranged to provide a photonic bandgap over a range of wavelengths of light, the structure, in a transverse cross section of the waveguide, surrounding the core and comprising elongate relatively low refractive index regions interspersed with elongate relatively high refractive index regions; and

10 a relatively high refractive index boundary at the interface between the core defect and the photonic bandgap structure, the boundary having a thickness around the core such that, in use, light guided by the waveguide is guided in a transverse mode providing an F-factor of less than $0.23\mu\text{m}^{-1}$ for an operating wavelength of $1.55\mu\text{m}$, less than an equivalent F-factor value scaled for a different operating wavelength or less than $0.7\Lambda^{-1}$ for structures having a
15 periodic cladding and a pitch Λ .

7. A waveguide according to any one of claims 2 to 6, in which the boundary is anti-resonant at an operating wavelength of light.

8. A waveguide according to any one of the preceding claims, in which the boundary is a reflector.

20 9. A waveguide as claimed in any preceding claim, in which the boundary has a substantially constant thickness around the core.

10. A waveguide as claimed in any one of claims 1 to 8, in which the boundary has a thickness that varies around the core.

11. A waveguide as claimed in claim 10, in which the boundary has a thickness that varies
25 periodically around the core.

12. A waveguide as claimed in claim 10 or claim 11, wherein the core boundary has a thickness t around at least a proportion y of the boundary, where $y > 0.5$.

13. A waveguide as claimed in any preceding claim, in which, in the transverse cross section, the photonic bandgap structure comprises an array of the relatively low refractive
30 index regions separated from one another by the relatively high refractive index regions.

14. A waveguide as claimed in claim 13, in which the array is substantially periodic.

15. A waveguide as claimed in claim 13 or claim 14, in which the array is a substantially triangular array.

16. A waveguide as claimed in any preceding claim, in which at least two of the higher index regions in the photonic bandgap structure are connected to each other.

17. A waveguide as claimed in claim 16, in which the higher index regions in the photonic bandgap structure are interconnected

5 18. A waveguide as claimed in any preceding claim, in which the photonic bandgap structure comprises an arrangement of isolated relatively low refractive index regions separated by connected regions of relatively high refractive index.

19. A waveguide as claimed in claim 18, in which the connected regions of relatively high refractive index comprise an array of veins, each vein being connected at each end thereof to a
10 node, which, in turn, is connected to at least two other veins.

20. A waveguide as claimed in claim 19, in which each vein has a characteristic thickness substantially at its mid-point between the two nodes to which it is connected.

21. A waveguide as claimed in any preceding claim, in which the boundary comprises, in the transverse cross-section, a plurality of relatively high refractive index boundary veins
15 connected end-to-end around the boundary between neighbouring boundary nodes, each boundary vein being connected between a leading boundary node and a following boundary node, with no nodes in between, and each boundary node being connected between two boundary veins and to a relatively high refractive index region of the photonic bandgap structure.

20 22. A waveguide according to claim 21, wherein each boundary vein has a characteristic thickness substantially at the mid-point between the two boundary nodes to which it is connected.

23. A waveguide according to claim 22, wherein more than a half of the boundary veins have a characteristic thickness at their mid-points, which is substantially the thinnest region
25 along the vein.

24. A waveguide according to claim 22 or claim 23, wherein the characteristic thickness of at least one boundary vein is at least 110% of the characteristic thickness of a plurality of the veins in the array of veins in the photonic band-gap structure.

25. A waveguide according to any one of claims 22 to 24, wherein the characteristic
30 thickness of a plurality of the boundary veins is at least 110% of the characteristic thickness of a plurality of the veins in the array of veins in the photonic band-gap structure.

26. A waveguide according to any one of claims 22 to 25, wherein the characteristic thickness of at least a majority of the boundary veins is at least 110% of the characteristic

thickness of at least a majority of the veins in the array of veins in the photonic band-gap structure.

27. A waveguide according to any one of claims 22 to 26, wherein the boundary veins are at least 180% of the characteristic thickness of the veins in the array.
- 5 28. A waveguide according to claim 22 or claim 23, wherein substantially all of the boundary veins are thicker than substantially all of the veins in the photonic band-gap structure.
29. A waveguide as claimed in any one of the preceding, in which the array has a characteristic primitive unit cell and a pitch Λ .
- 10 30. A waveguide as claimed in claim 29, in which the boundary has a thickness t , wherein, $t = u\Lambda$ for a proportion of the boundary y , where $u > 0.06$ and $y > 0.5$.
31. A waveguide as claimed in any one of claims 1 to 23, in which the core boundary has a thickness t defined by

$$\frac{a\lambda}{4\sqrt{n_{HI}^2 - n_{LO}^2}} \leq t \leq \frac{b\lambda}{4\sqrt{n_{HI}^2 - n_{LO}^2}}, \text{ where } a=0.5 \text{ and } b=1.75.$$
- 15 32. A waveguide as claimed in any preceding claim, in which the core has, in the transverse cross-section, an area that is significantly greater than the area of at least some of the relatively low refractive index regions of the photonic bandgap structure.
33. A waveguide as claimed in claim 32, in which the core has, in the transverse cross-section, an area that is greater than twice the area of at least some of the relatively low
- 20 refractive index regions of the photonic bandgap structure.
34. A waveguide as claimed in any preceding claim, in which the core has, in the transverse cross-section, an area that is greater than the area of each of the relatively low refractive index regions of the photonic bandgap structure.
35. A waveguide as claimed in any preceding claim, wherein the core has, in the
- 25 transverse cross-section, a transverse dimension that is greater than the pitch Λ of the photonic band-gap cladding
36. A waveguide as claimed in any one of the preceding claims, in which at least some of the relatively low refractive index regions have a refractive index below 1.4.
37. A waveguide according to claim 36, in which at least some of the relatively low
- 30 refractive index regions have a refractive index below 1.1.
38. A waveguide as claimed in any preceding claim, in which at least some of the relatively low refractive index regions are voids filled with air or under vacuum.

39. A waveguide as claimed in any one of claims 1 to 37, in which at least some of the relatively low refractive index regions are voids filled with a liquid or a gas other than air.

40. A waveguide as claimed in any preceding claim, in which at least some of the relatively high refractive index regions comprise silica glass.

5 41. A waveguide as claimed in any preceding claim, in which the relatively low refractive index regions make up more than 75% by volume of the photonic bandgap structure.

42. An optical fibre comprising a waveguide according to any one of the preceding claims.

43. An optical fibre as claimed in claim 42, wherein the loss of the optical fibre is less
10 than 12dB/km.

44. An optical fibre as claimed in claim 43, wherein the loss of the optical fibre is less than 5dB/km.

45. An optical fibre transmission system comprising a transmitter, a receiver and an optical fibre, as claimed in any one of claims 42 to 44, for transmitting light between the
15 transmitter and the receiver.

46. Data conditioned by having been transmitted through a transmission system as claimed in claim 45.

47. A method of forming elongate waveguide, comprising the steps:
forming a preform stack by stacking a plurality of elongate elements;
20 omitting, or substantially removing at least one elongate element from an inner region of the stack; and

heating and drawing the stack, in one or more steps, into a waveguide of a type described above as being according to the invention.

48. A method of forming elongate waveguide for guiding light, comprising the steps:
25 simulating the waveguide in a computer model, the waveguide comprising a core, comprising an elongate region of relatively low refractive index and a photonic bandgap structure arranged to provide a photonic bandgap over a range of wavelengths of light, the structure comprising elongate regions of relatively low refractive index interspersed with elongate regions of relatively high refractive index, including a boundary region of relatively
30 high refractive index that surrounds, in a transverse cross-section of the waveguide, the core, wherein properties of the boundary region are represented in the computer model by parameters;

finding a set of values of the parameters that, according to the model, increases or maximises how much of the light guided by the waveguide is in the regions of relatively low refractive index in the waveguide; and

making a waveguide using the values.

5 49. A method of forming elongate waveguide for guiding light, comprising the steps:

simulating the waveguide in a computer model, the waveguide comprising a core, comprising an elongate region of relatively low refractive index and a photonic bandgap structure arranged to provide a photonic bandgap over a range of frequencies of light, the structure comprising elongate regions of relatively low refractive index interspersed with
10 elongate regions of relatively high refractive index, including a boundary region of relatively high refractive index that surrounds, in a transverse cross-section of the waveguide, the core wherein properties of the boundary region are represented in the computer model by parameters;

finding a set of values of the parameters that, according to the model, decreases or
15 minimises the F-factor of the waveguide; and

making a waveguide using the values.

50. A photonic crystal fibre, comprising:

an elongate, relatively low refractive index core;

an elongate photonic bandgap structure surrounding the core and comprising, in the
20 transverse cross section, a lattice of relatively low refractive index regions separated by connected relatively high refractive index regions; and

a concentric boundary region, at the interface between the core and the photonic bandgap structure, the core boundary region being generally thicker around its circumference than regions of relatively high refractive index in the photonic bandgap structure.

1/15

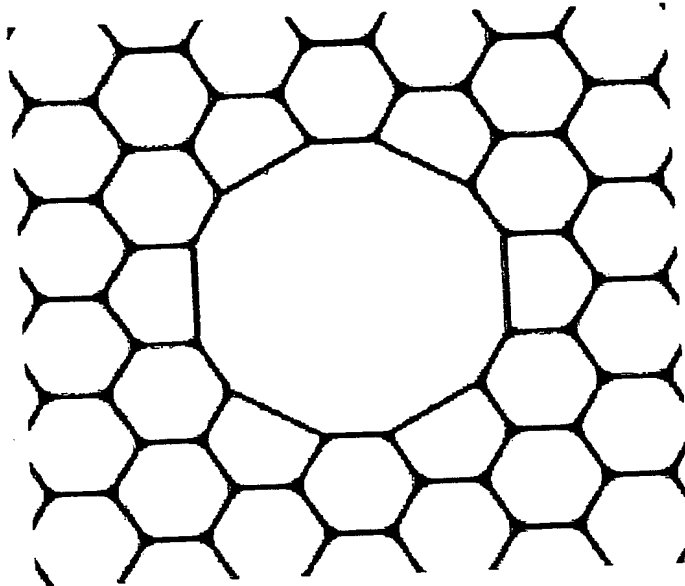


Figure 1

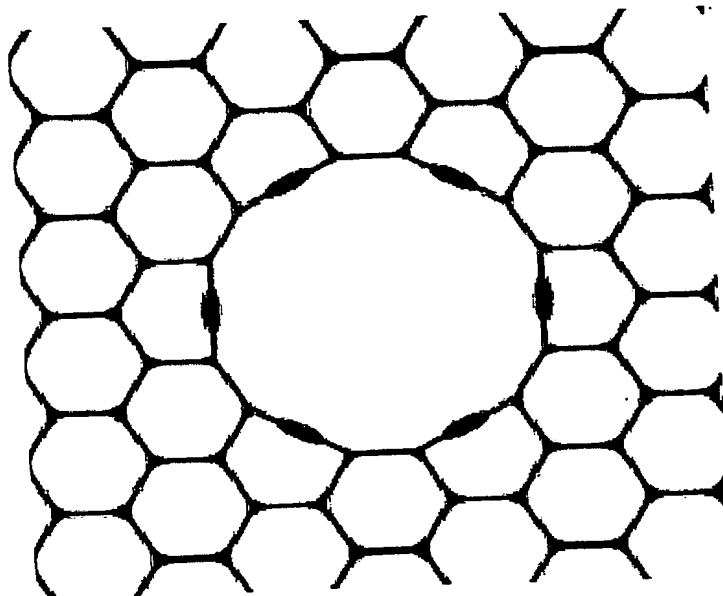


Figure 2

2/15

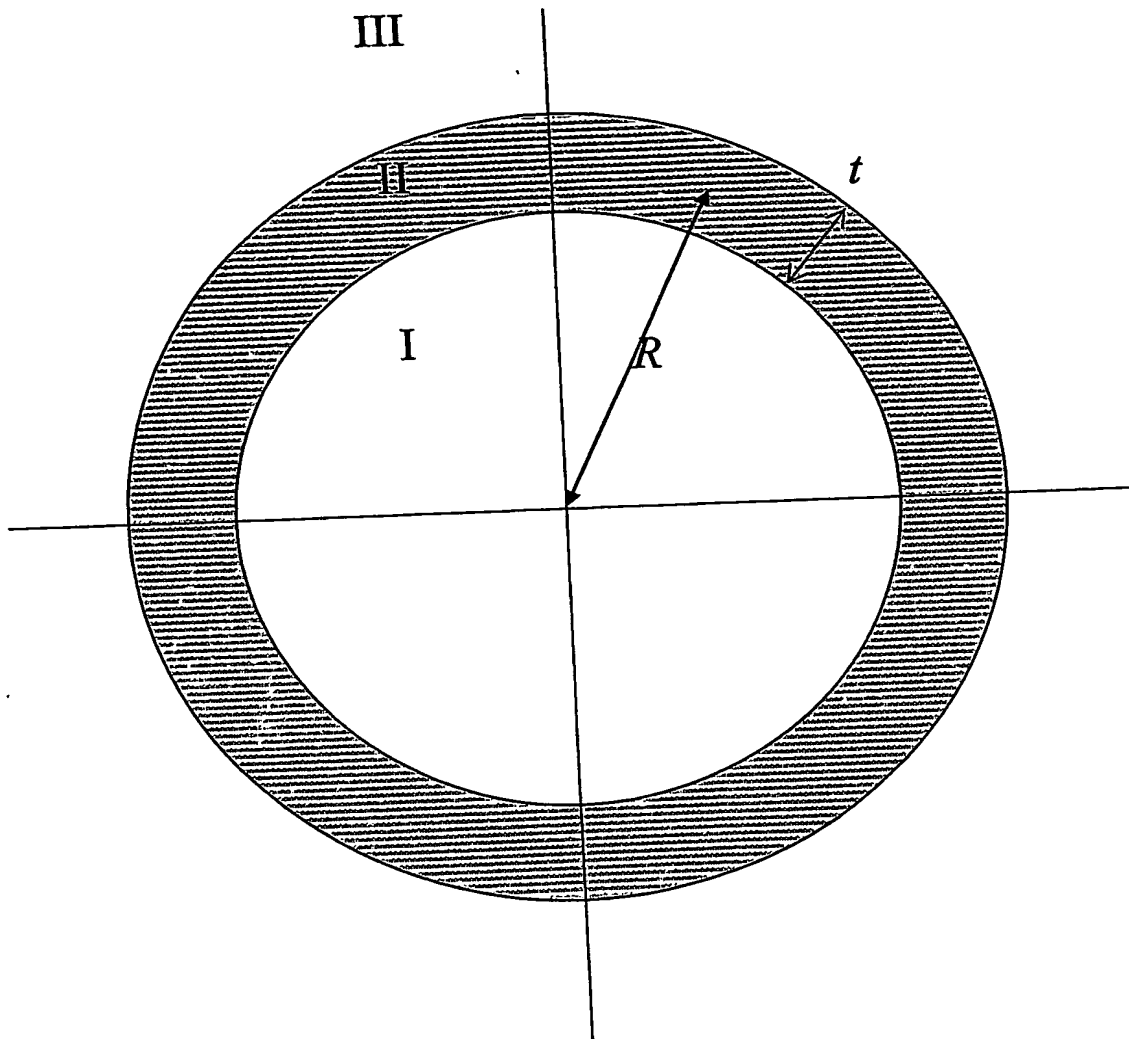




Figure 3

3/15

$\lambda = 1.55 \mu\text{m}$

R = mean ring radius

t = core thickness

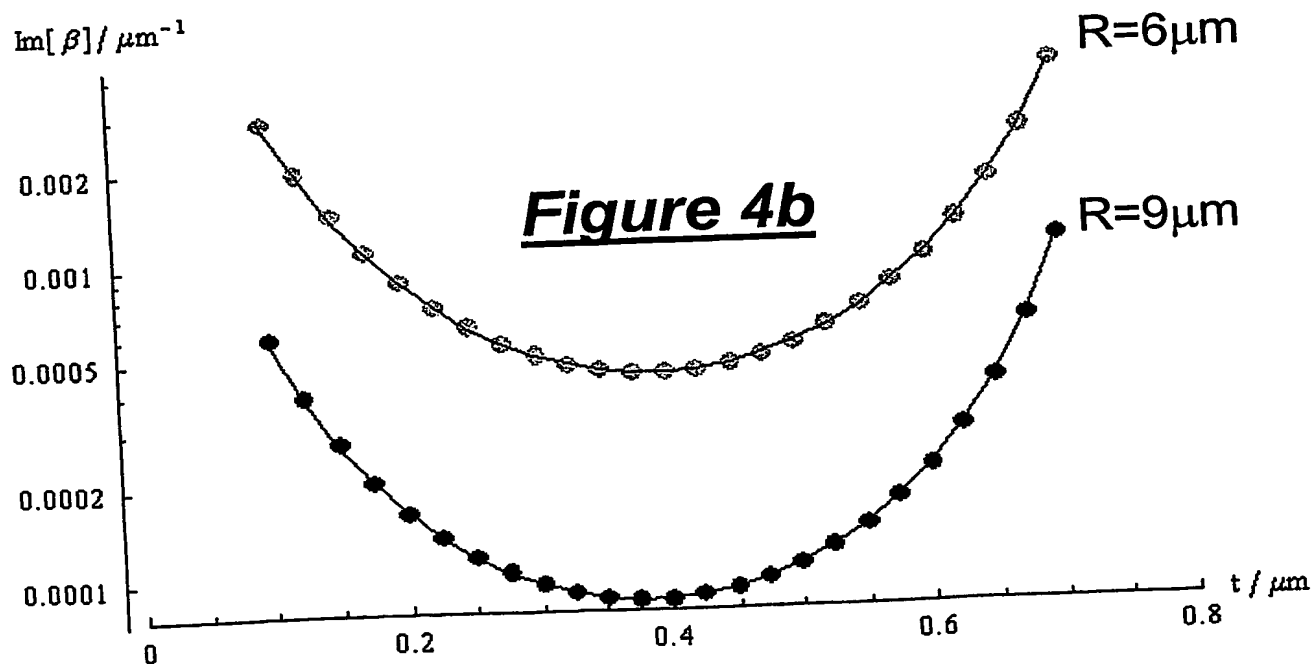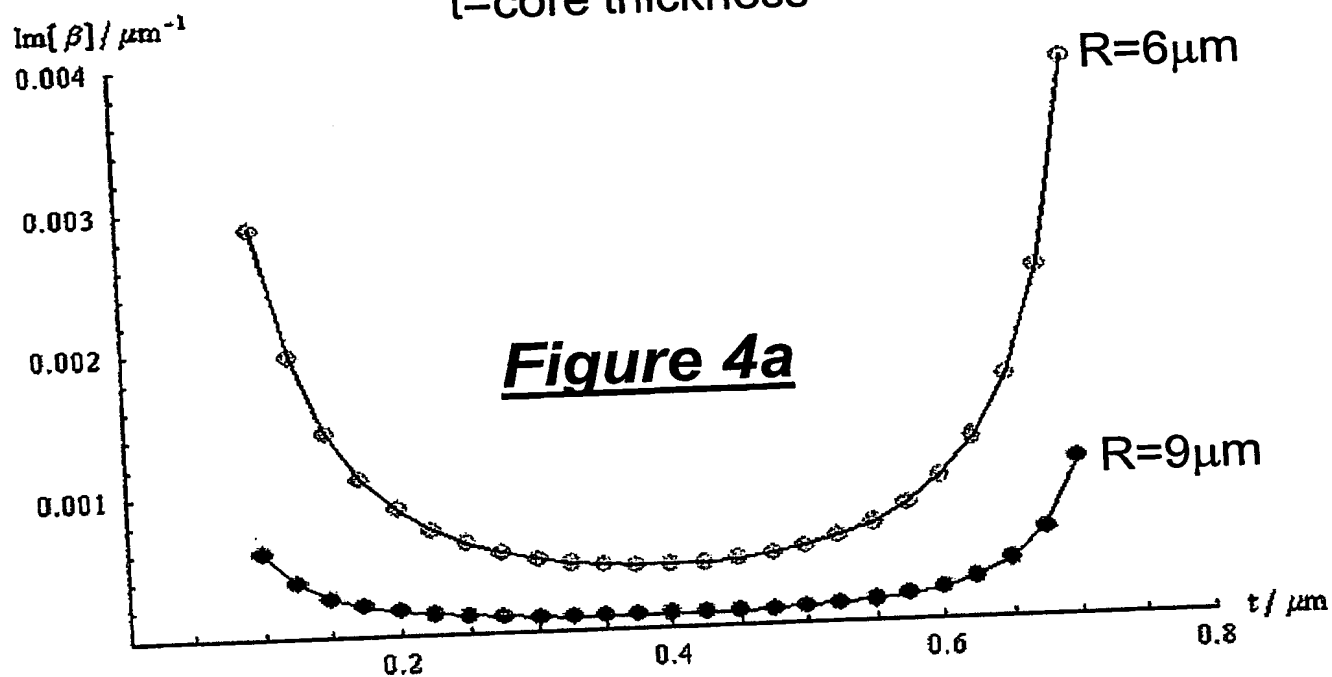

4/15


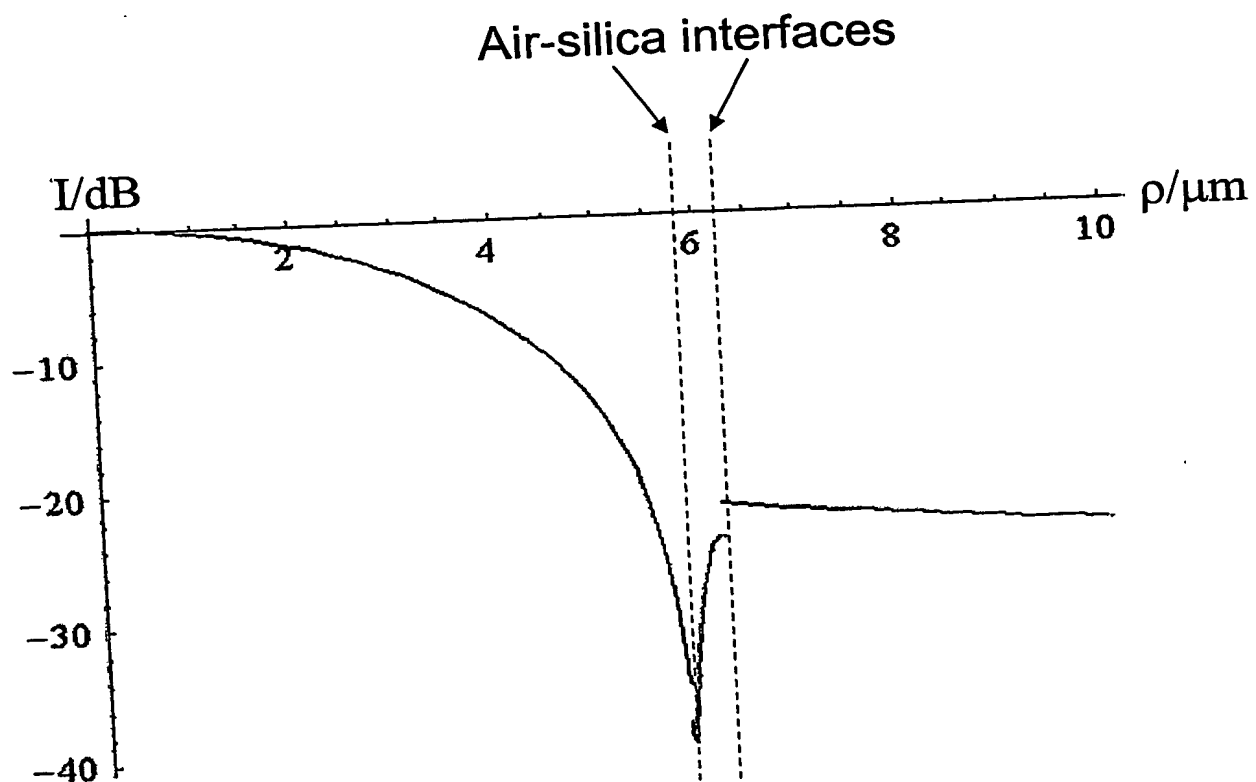


Figure 5

5/15

$t=0.392\mu\text{m}$

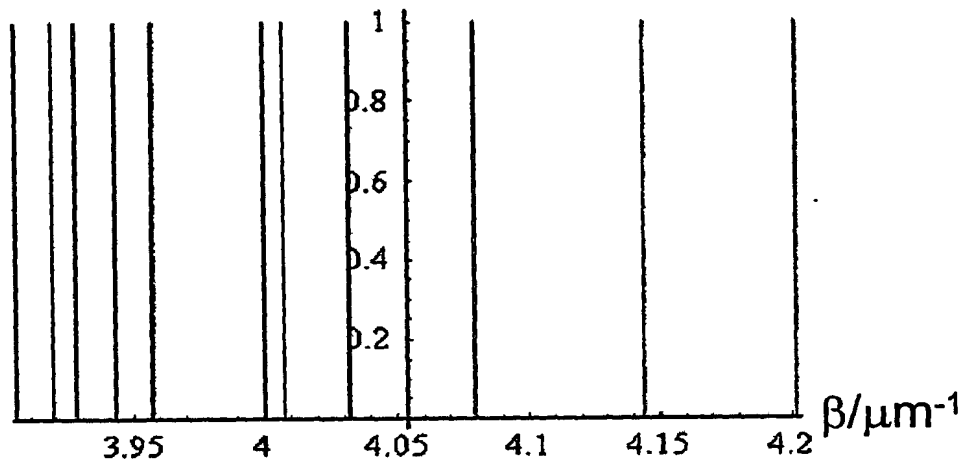

$t=0.1\mu\text{m}$


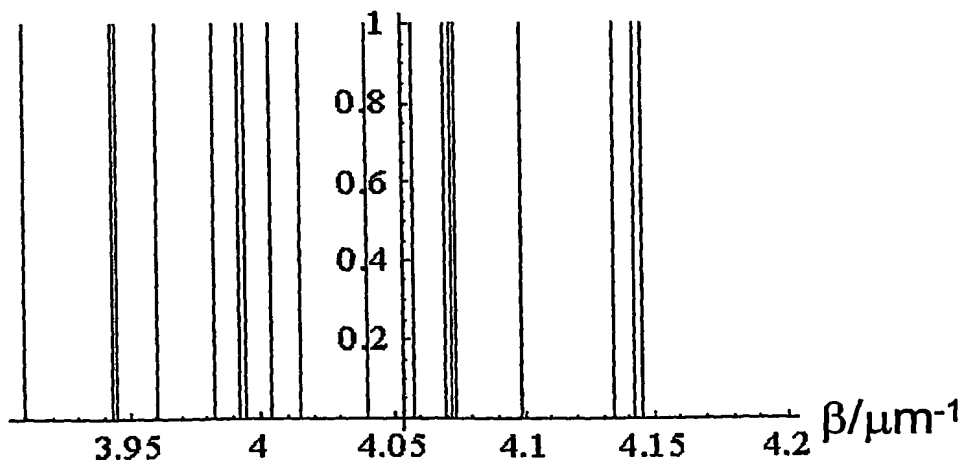


Figure 6

6/15

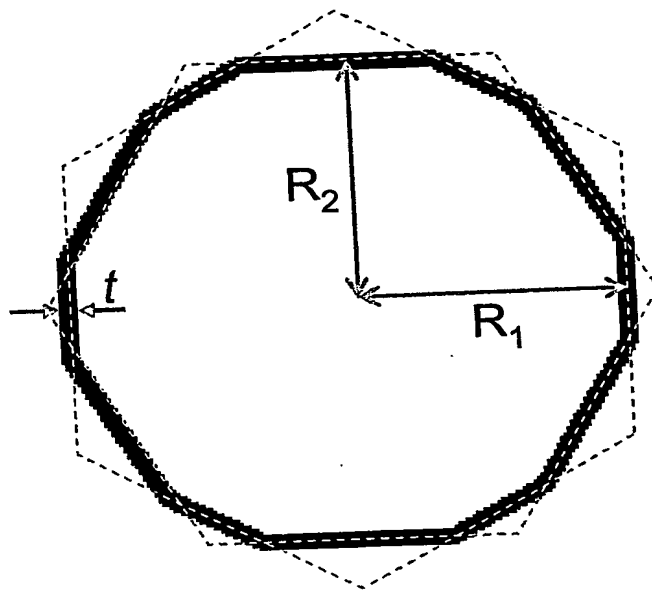

$$R_1 = \frac{3\sqrt{3}}{5} R_2$$

Figure 7

7/15

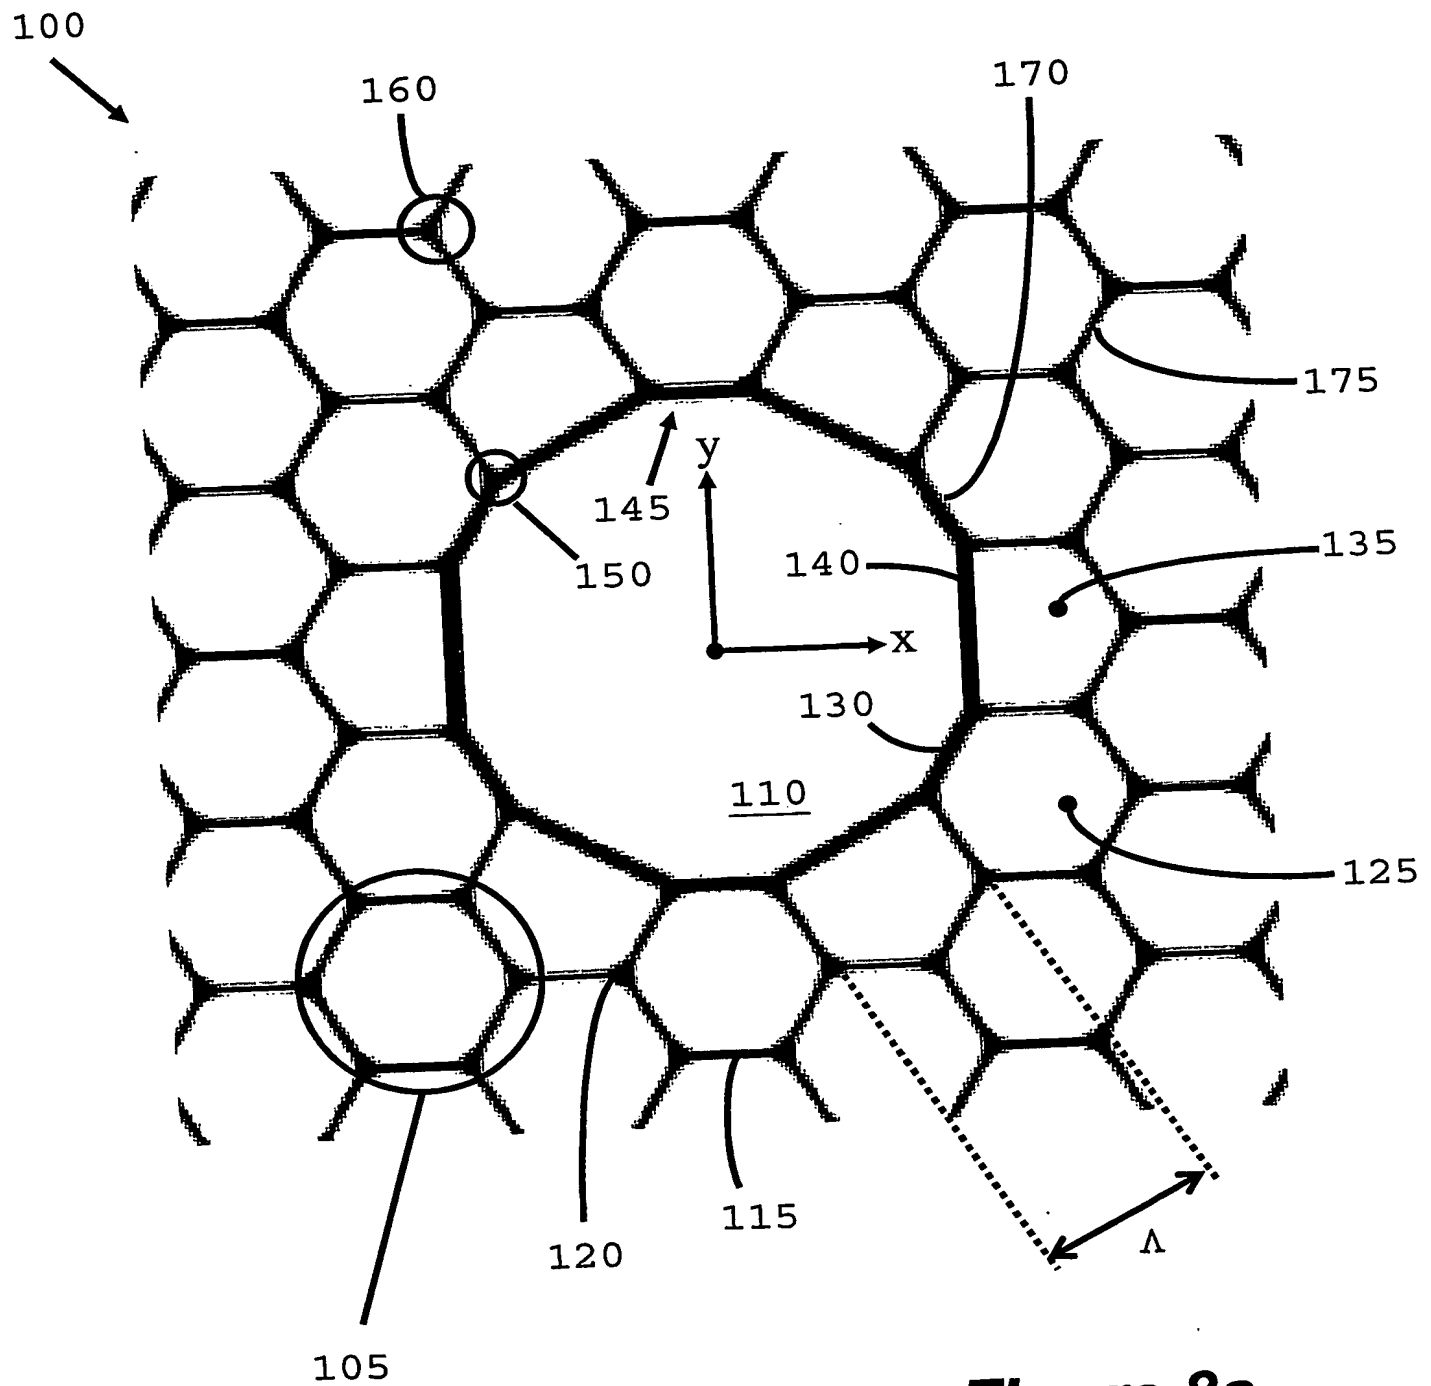


Figure 8a

8/15



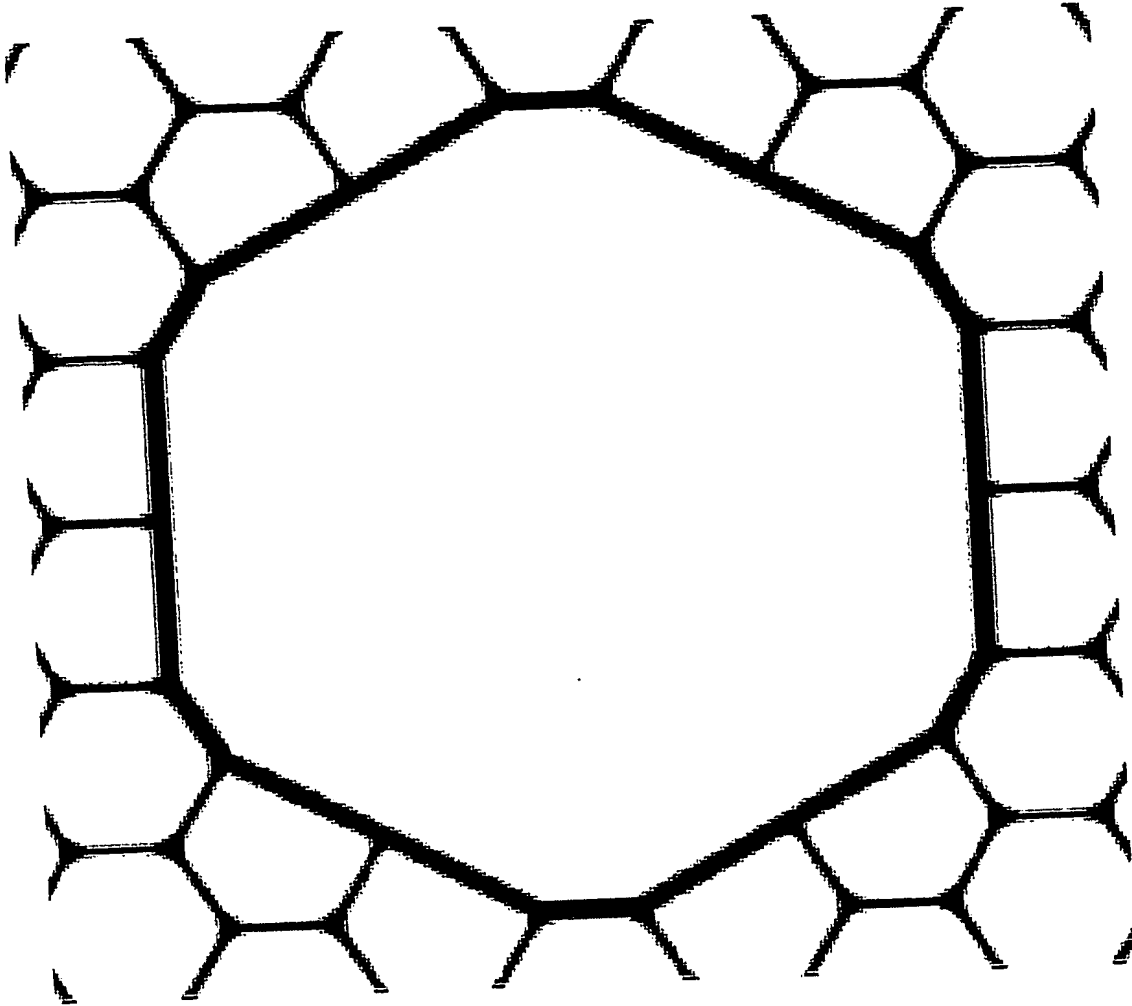


Figure 8b

9/15

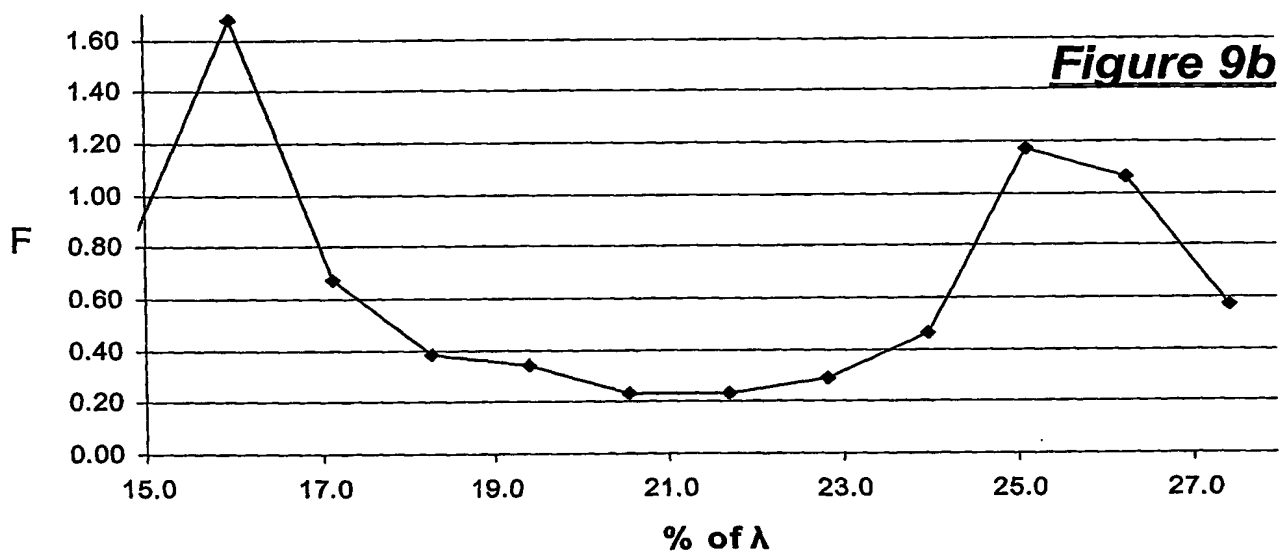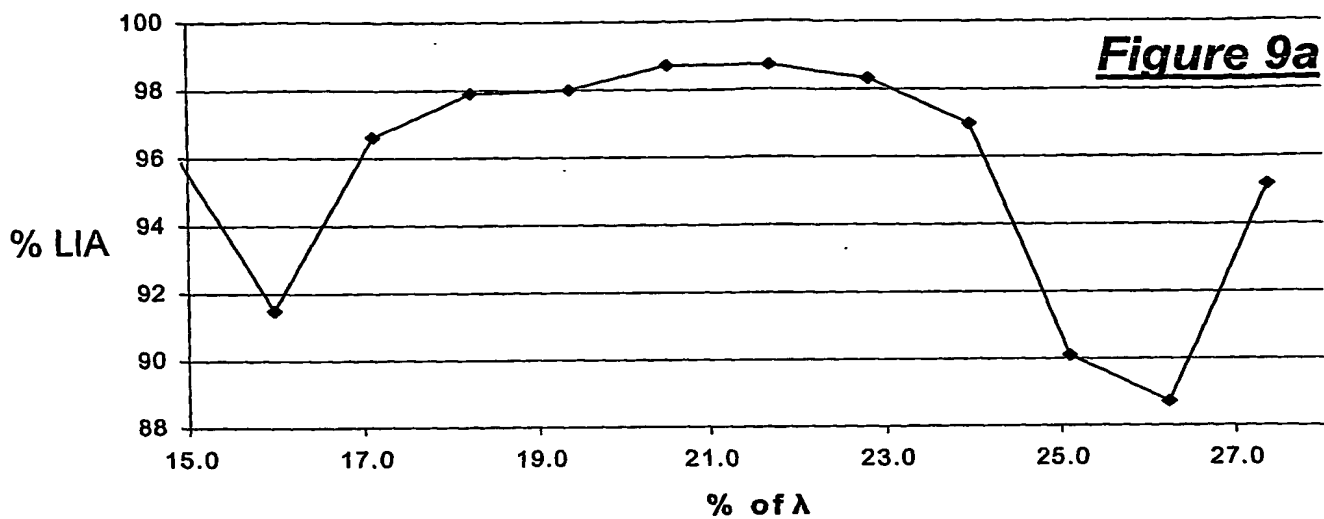

10/15

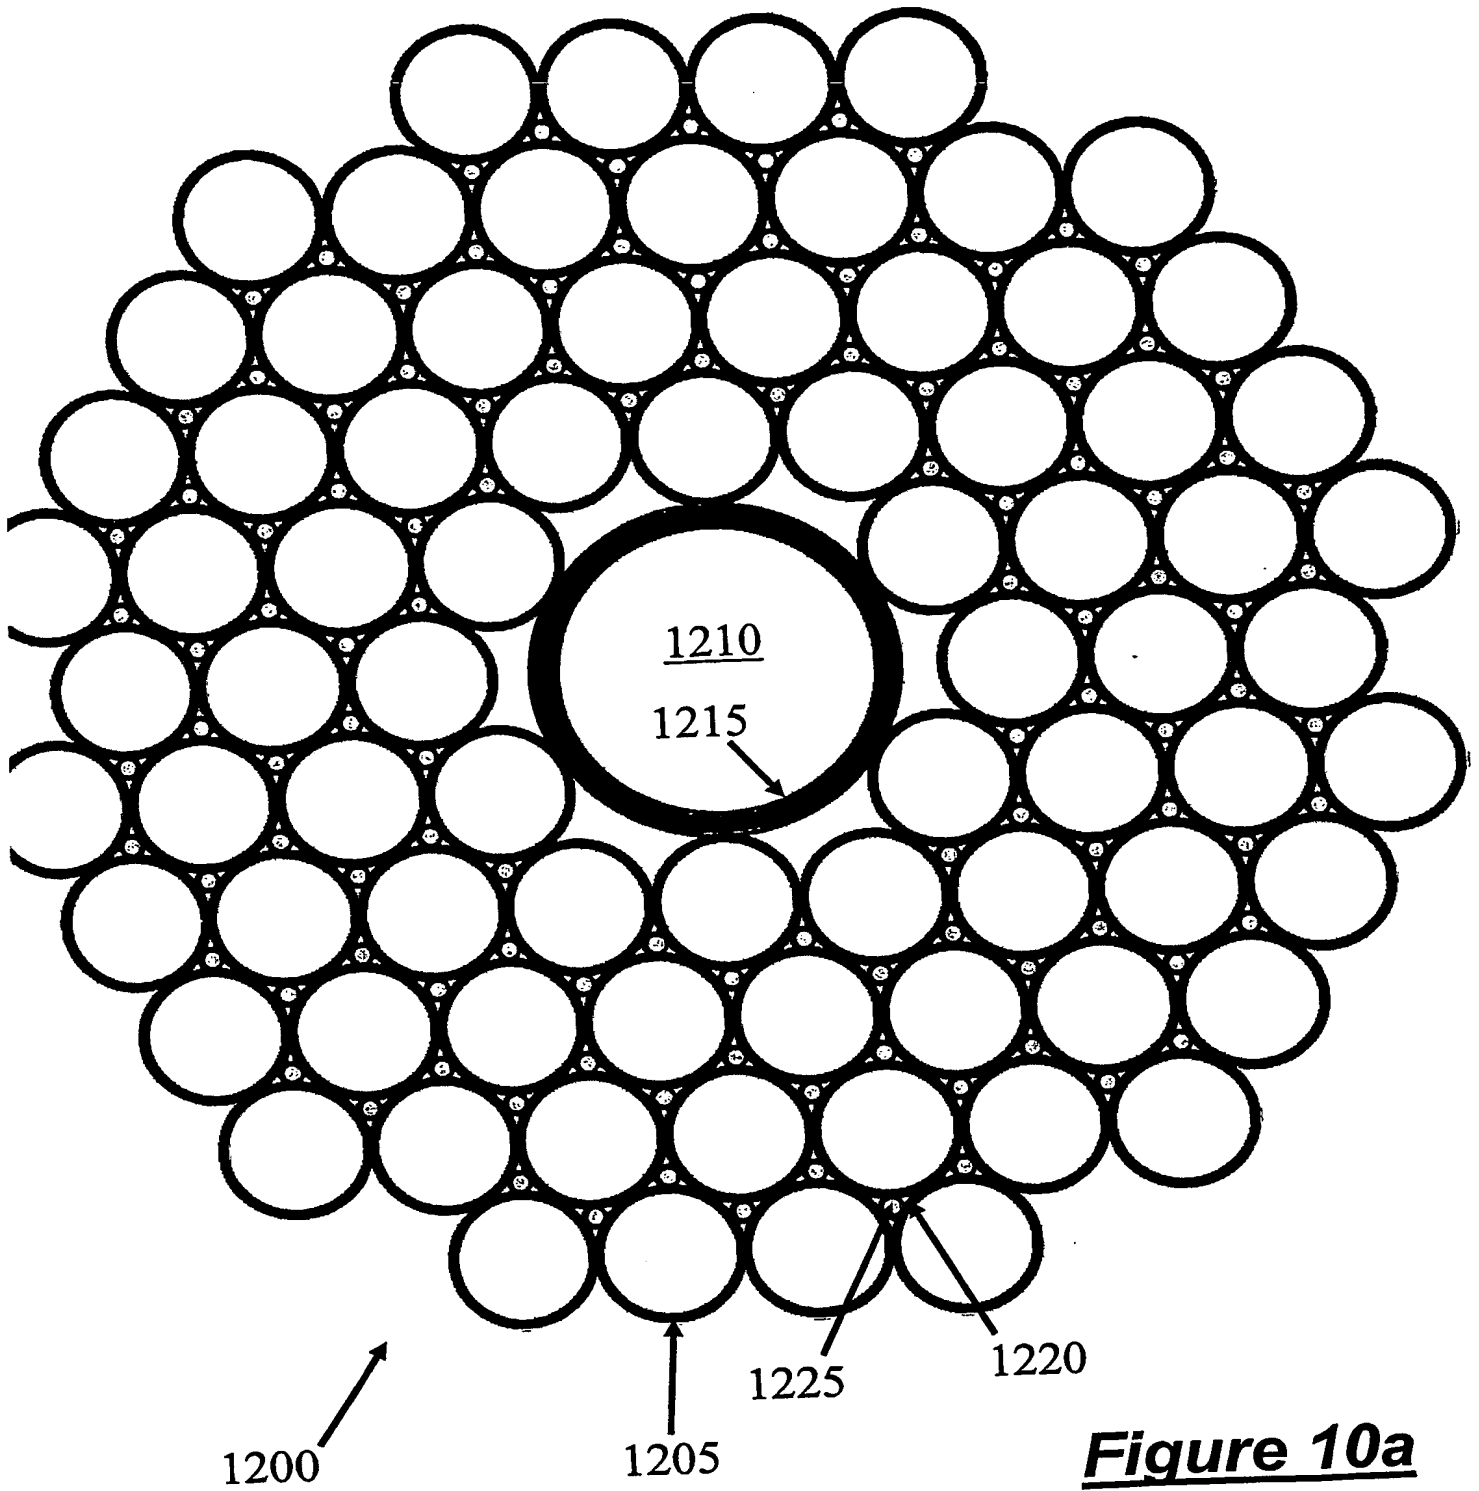


Figure 10a

11/15

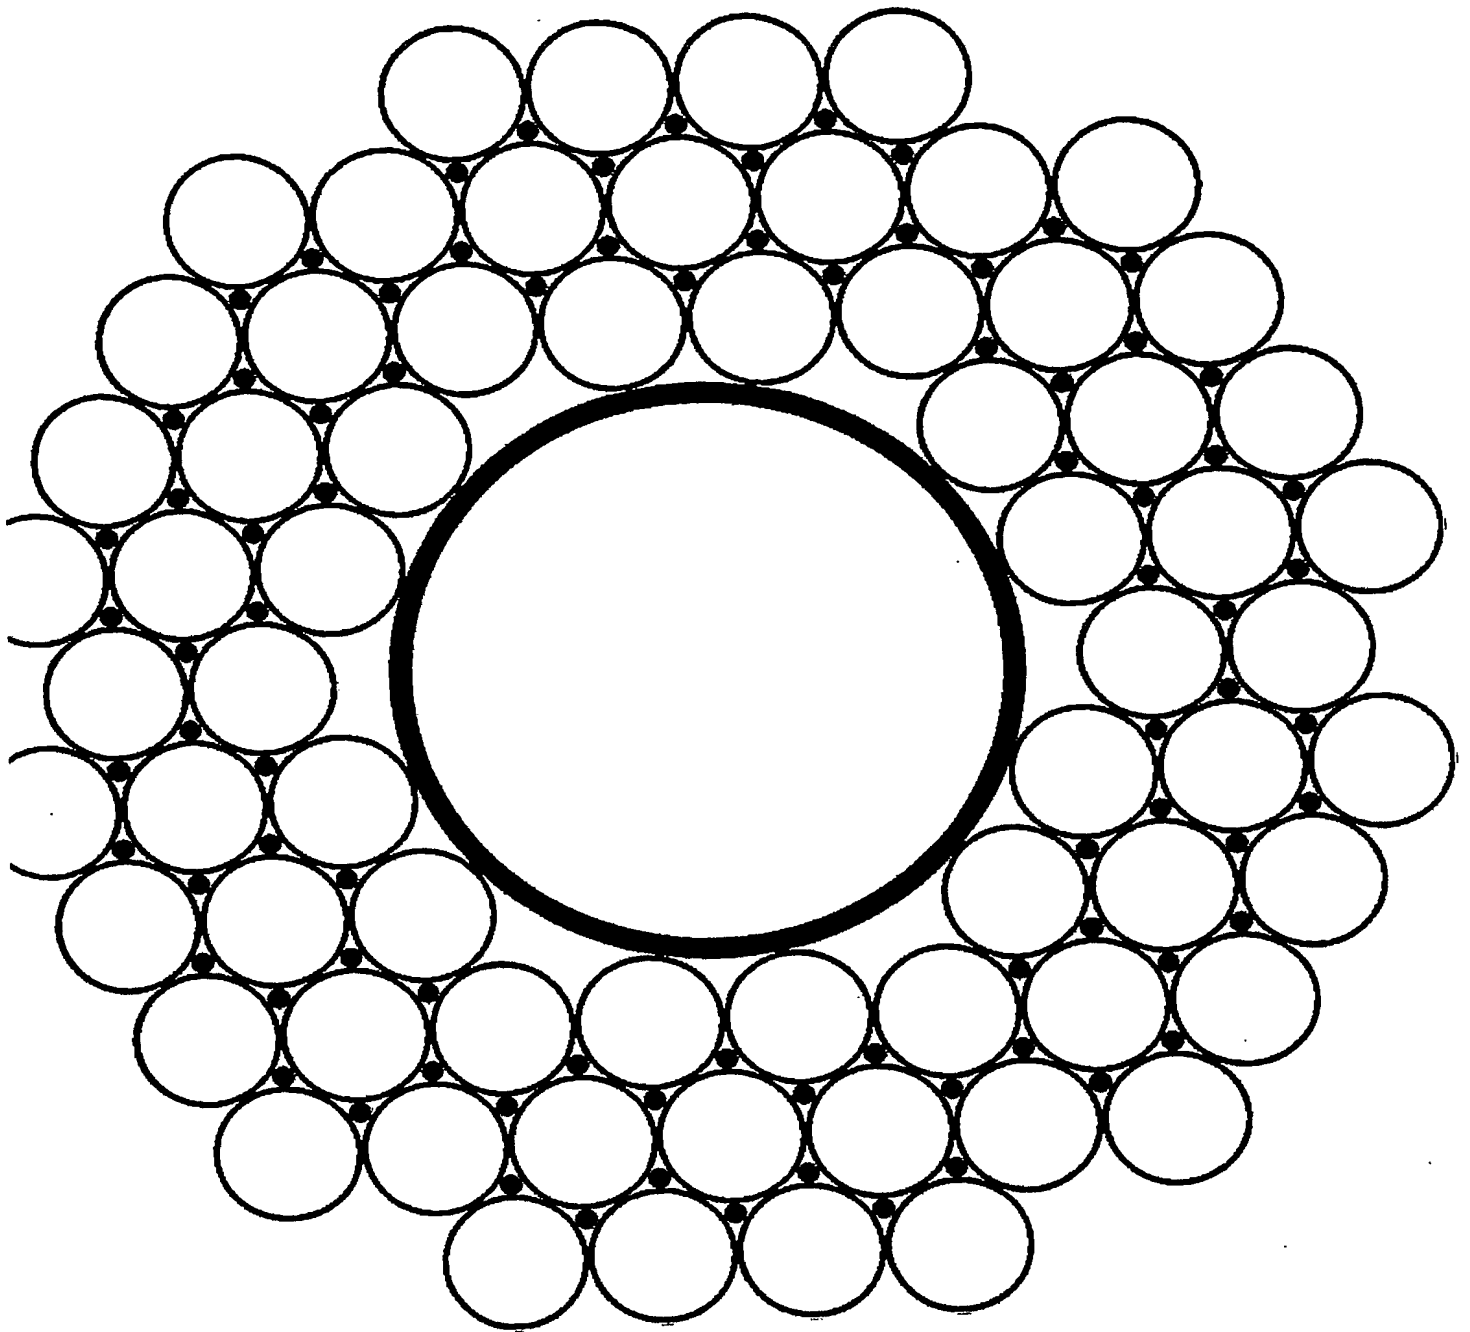


Figure 10b

12/15

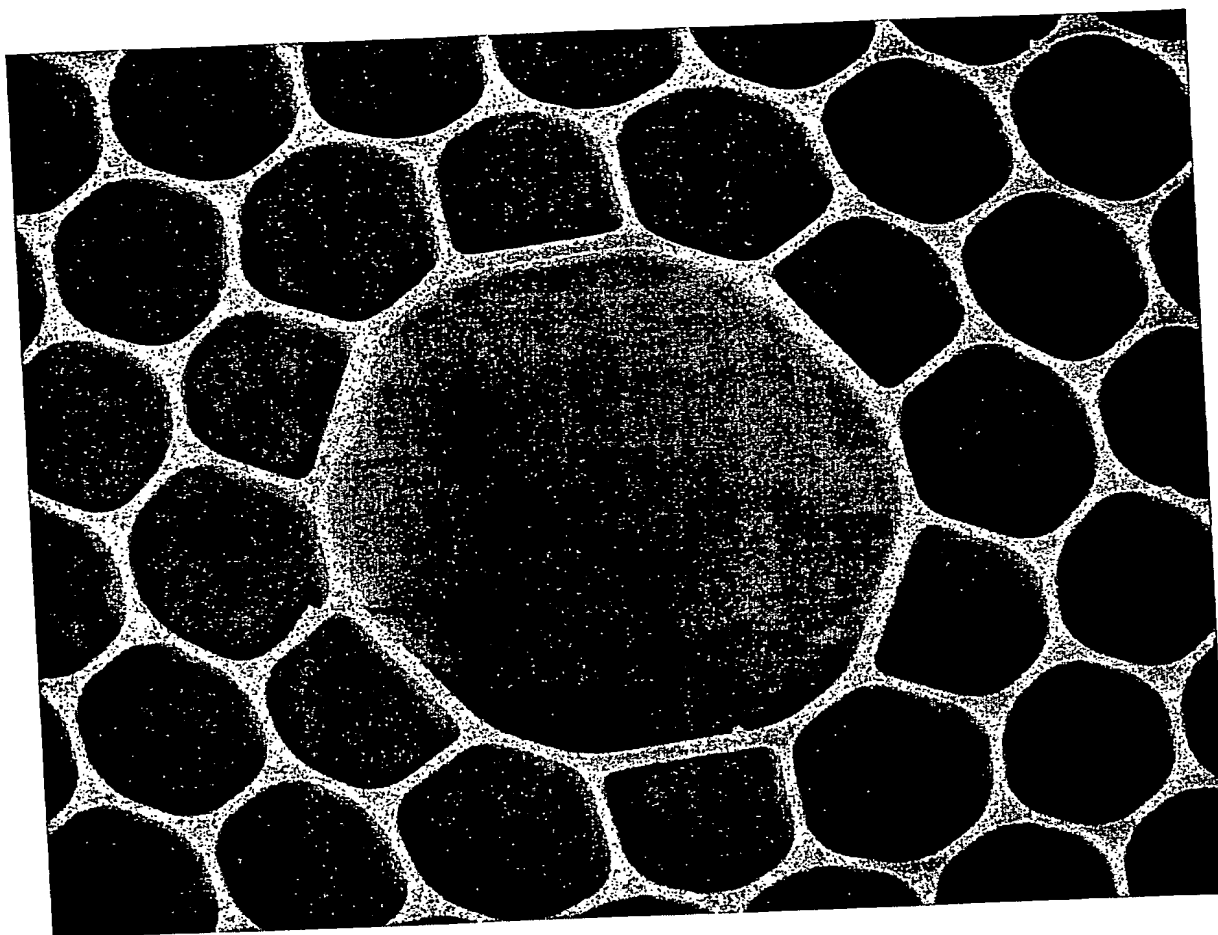


Figure 11a

13/15

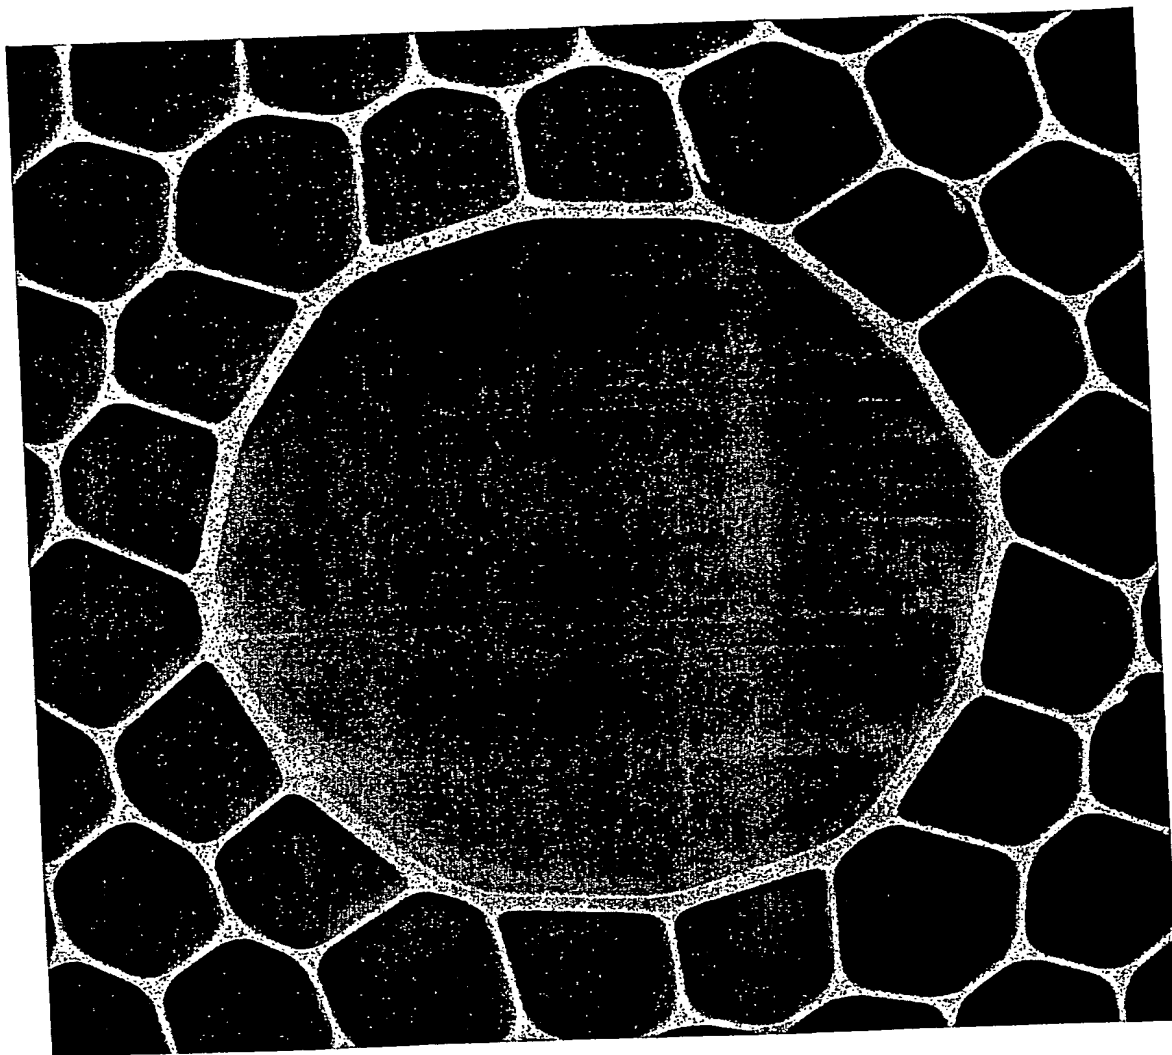


Figure 11b

14/15

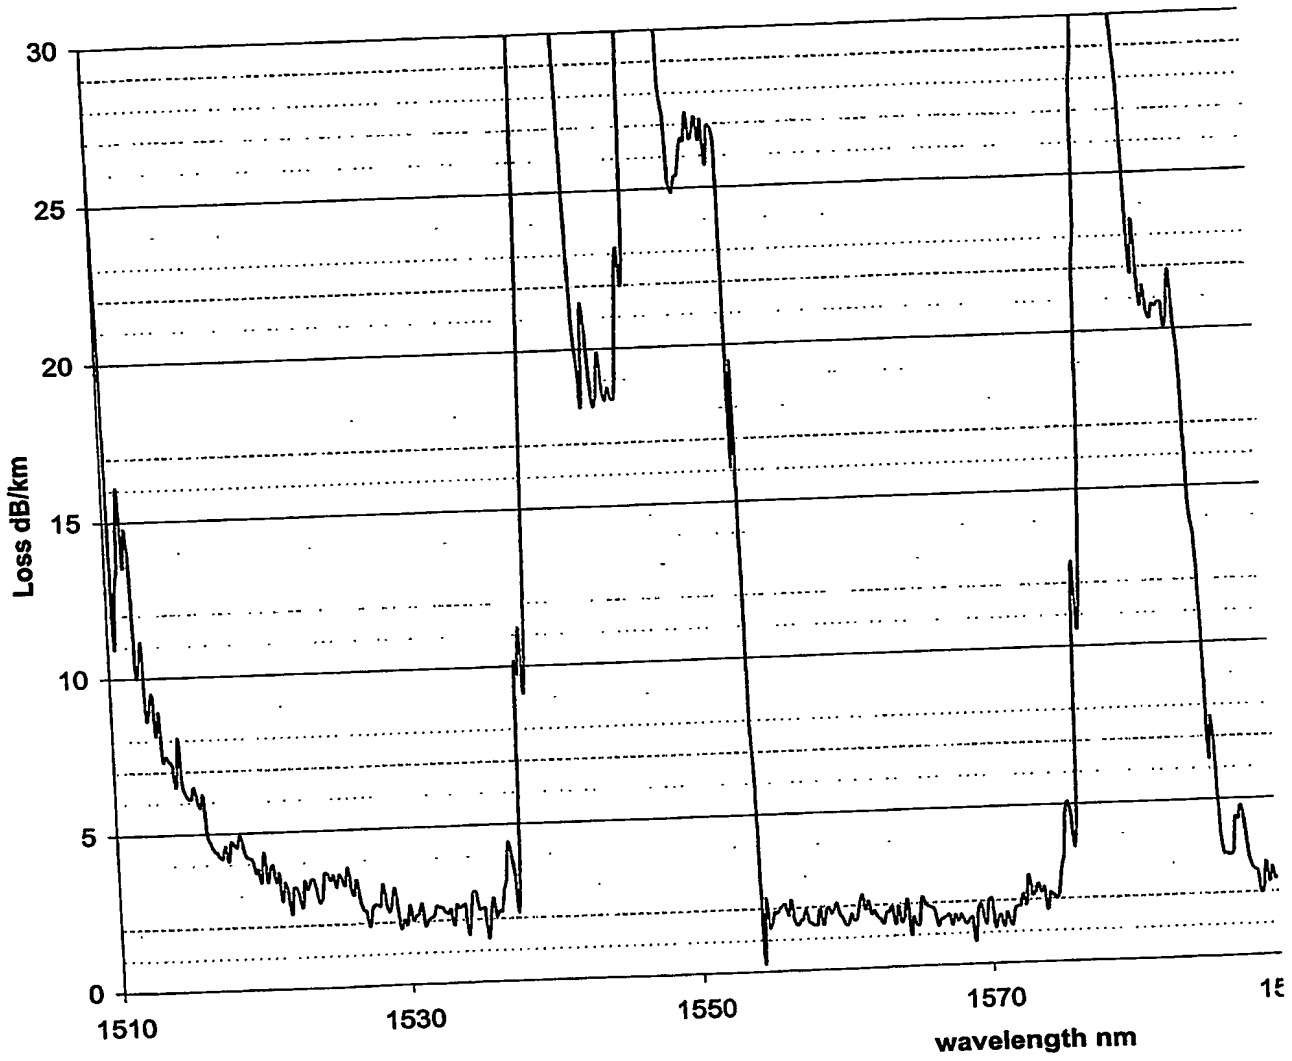


Figure 12

15/15

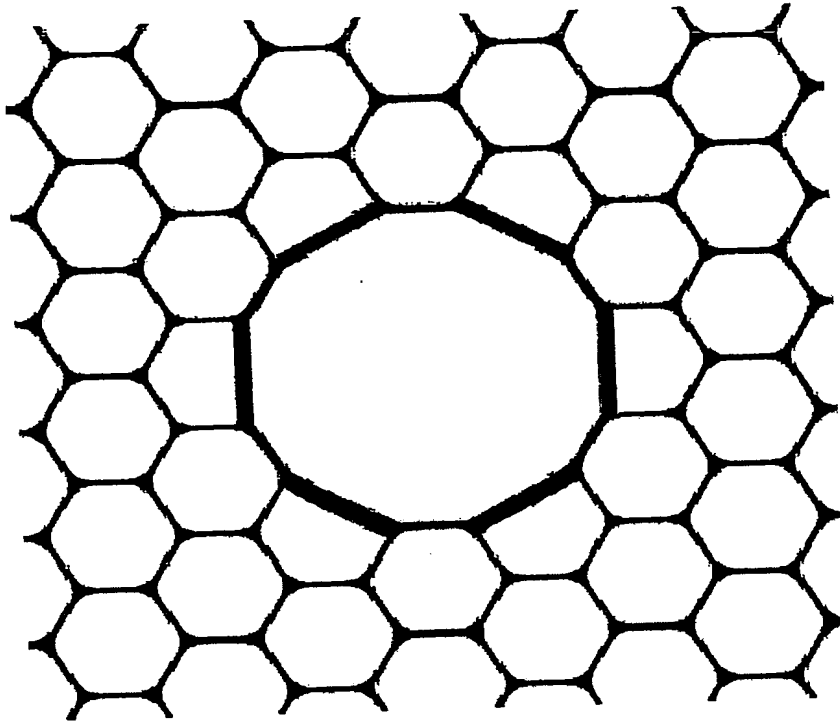


Figure 13

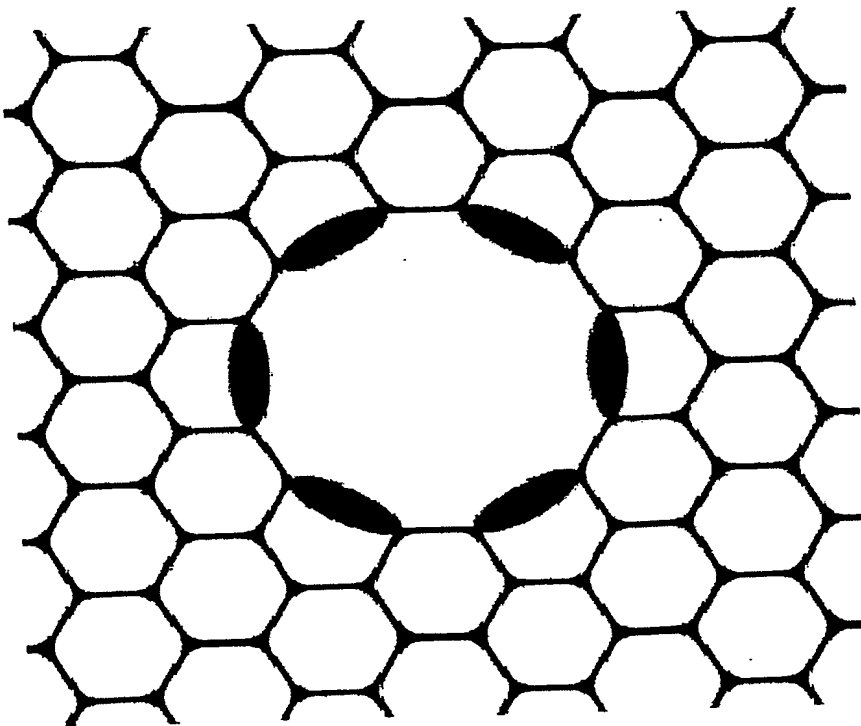


Figure 14

PCT/GB2004/001251



This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**